


FLOOR MOUNTED JIB CRANE - JIB-FM-20

APPROX WEIGHT: 596.08 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

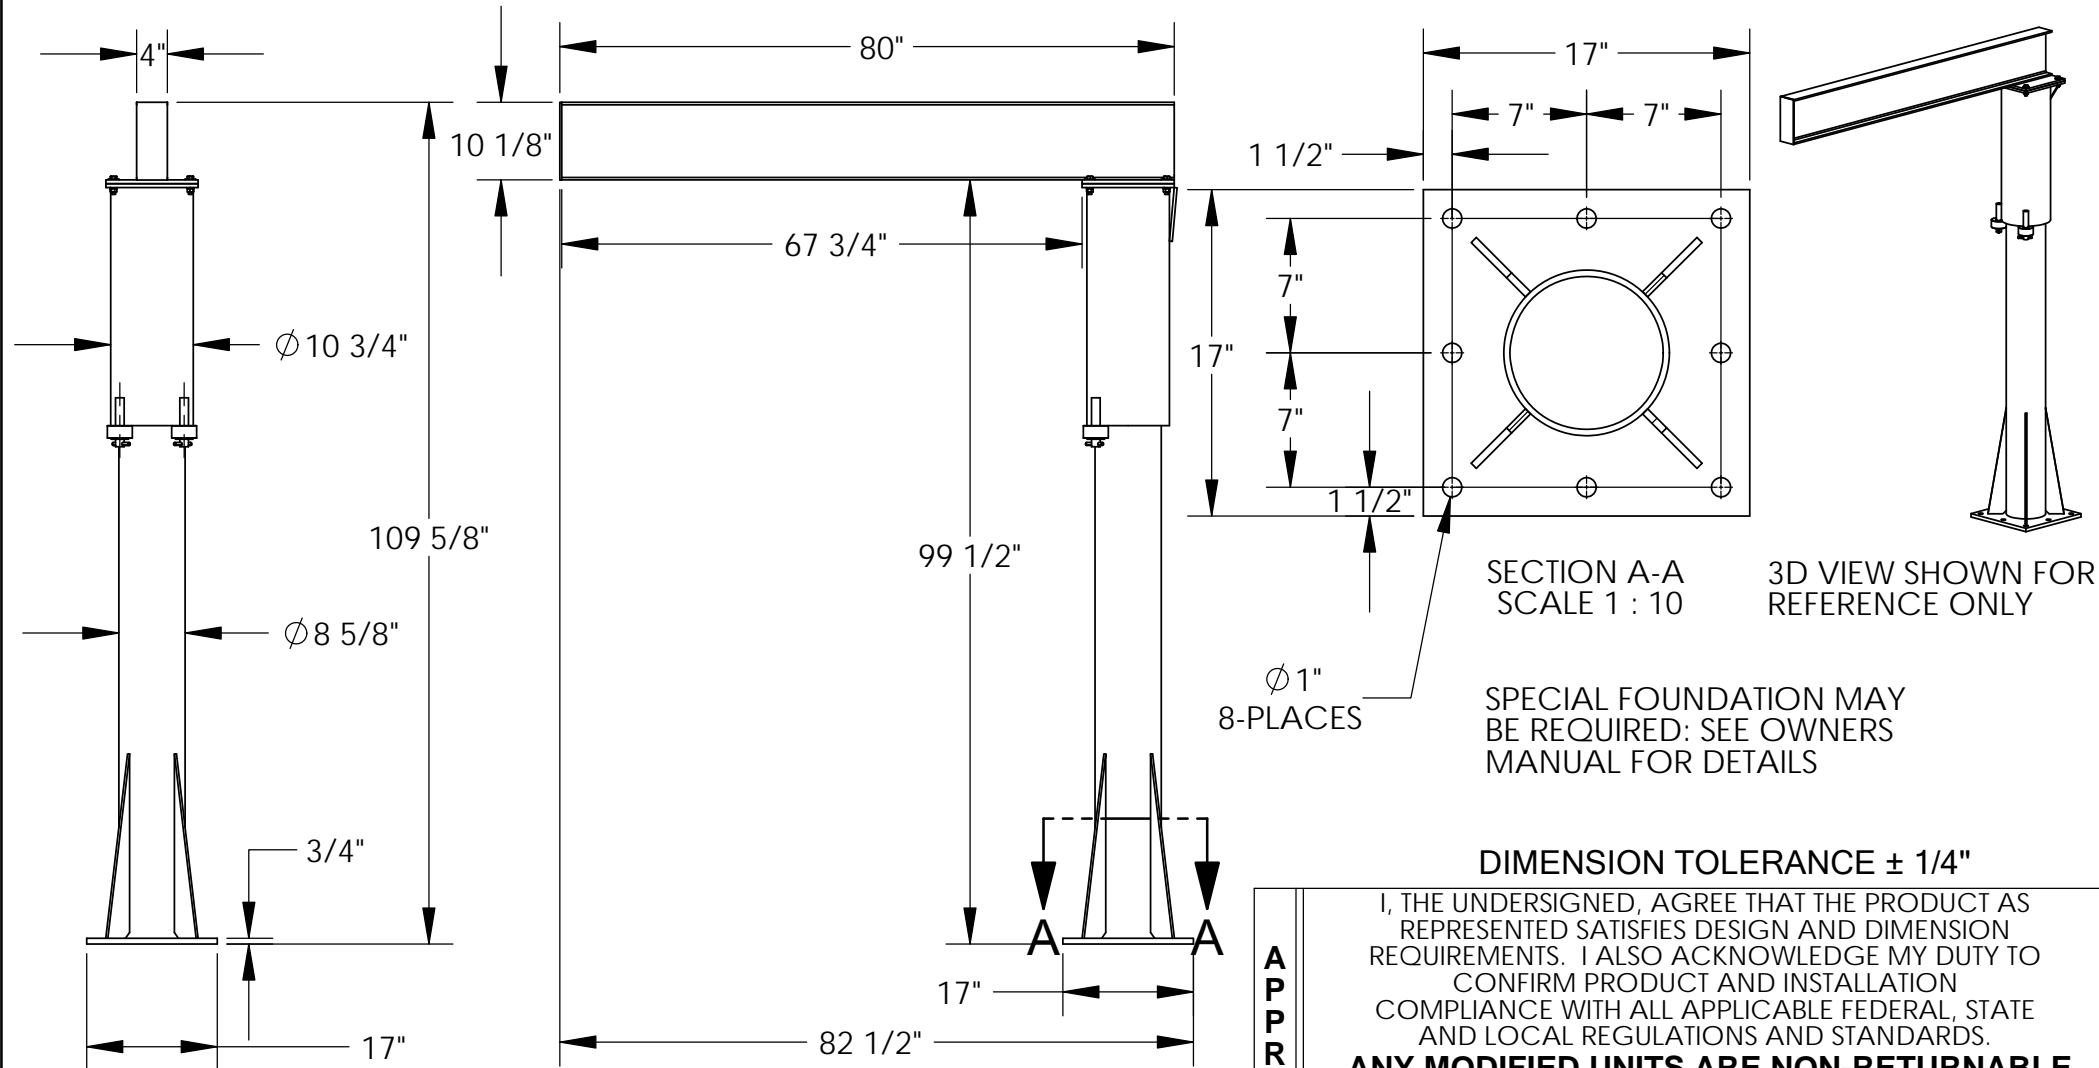

STANDARD FEATURES

MODEL NUMBER IS JIB-FM-20
CAPACITY IS 2000 LBS.
OVERALL WIDTH IS 17"
OVERALL LENGTH IS 82 1/2"
OVERALL I-BEAM LENGTH IS 80"
USABLE I-BEAM LENGTH IS 67 3/4"
OVERALL HEIGHT IS 109 5/8"
UNDER I-BEAM CLEARANCE IS 99 1/2"
I-BEAM SIZE: 10 1/8" HEIGHT X 4" FLANGE WIDTH
360° FULL ROTATION

SPECIAL FEATURES

NONE

DIMENSION TOLERANCE ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.
ANY MODIFIED UNITS ARE NON-RETURNABLE
[] As drawn [] As marked

Signed: _____ Date: _____
Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

APPROVAL

FOR INTERNAL USE ONLY PROJECT SIGN OFF	
SALES	
ENG.	
FAB.	
POWER	

DISTRIBUTOR'S NAME: VESTIL MANUFACTURING		P.O.# X
DRAWN BY: ND		W.O.# X
DATE: 6/20/2011	SALES: X	
REFERENCE: X	SCALE: 1:25	FILE NAME: 28-007-030
QUOTED LEAD TIME: X	QUOTE # X	