


# LIFT MASTER BOOM, HIGH RISE, TELESCOPING BOOM - LM-HRT-4-30

APPROX WEIGHT: 965.99 lbs.  
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\*

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

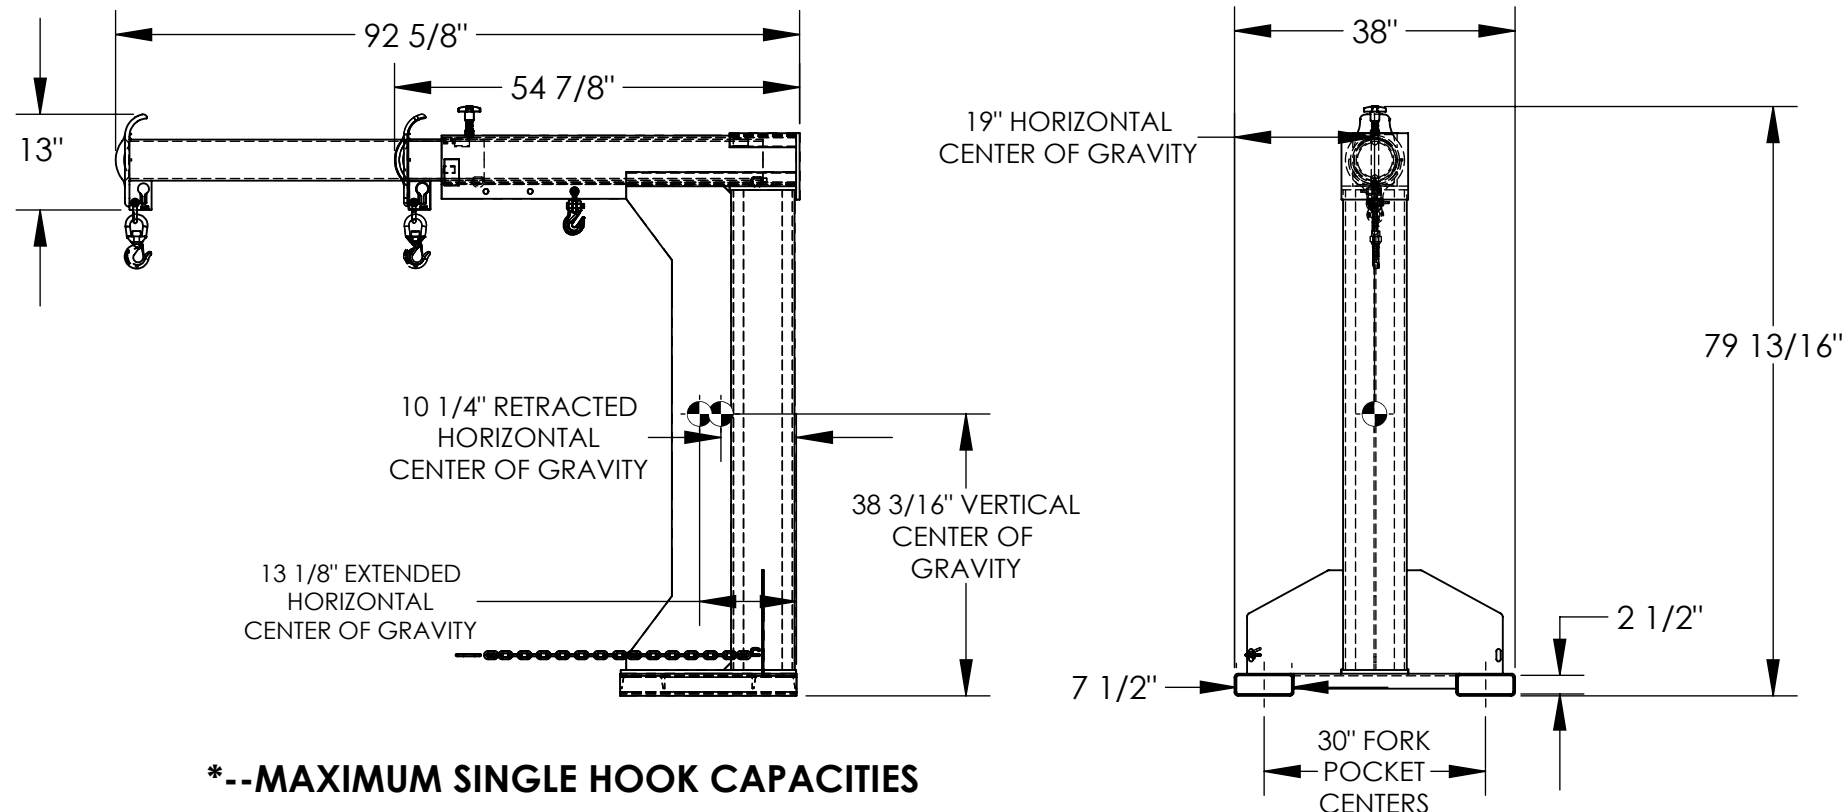

## \*--MAXIMUM SINGLE HOOK CAPACITIES

DISTANCE	30"	36"	42"	48"	54"	60"	66"	72"	78"	84"	90"
CAPACITY	4000	3750	3500	3250	3000	2750	2500	2250	2000	1750	1500

## STANDARD FEATURES

MODEL NUMBER: LM-HRT-4-30  
CAPACITY: 4,000 LBS  
OVERALL HEIGHT - 79 13/16"  
LENGTH (RETRACTED) - 54 7/8"  
LENGTH (EXTENDED) - 92 5/8"  
OVERALL WIDTH - 38"  
USABLE FORK POCKET - 2 1/2" X 7 1/2"  
30" FORK POCKET CENTERS  
30" MINIMUM HOOK POINT  
90" MAXIMUM HOOK POINT  
FRAME TOUGH BAKED IN POWDER COATED BLUE FINISH  
BOOM TOUGH BAKED IN POWDER COATED YELLOW FINISH

APPROX. WEIGHT / LOST LOAD = 965.99  
MINIMUM EFFECTIVE THICKNESS = <1"  
NEVER EXCEED LOAD CENTER  
RATING PER FORKTRUCK  
MANUFACTURERS GUIDELINES.  
DO NOT USE THIS FORK TRUCK  
ATTACHMENT IF LOAD WILL EXCEED  
FORK TRUCK MANUFACTURER'S  
LOAD CENTER RATING

## SPECIAL FEATURES

NONE

DIMENSION TOLERANCE  $\pm 1/4"$

APPROVAL

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.  
**UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE**  
[ ] As drawn [ ] As marked

Signed: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name: \_\_\_\_\_

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
DRAWN BY: BCN		W.O.#
DATE: 6/7/2016		X
REFERENCE: X	SCALE: 1:30	SALES: X
QUOTED LEAD TIME: X	QUOTE # X	FILE NAME:
		08-007-325