
ELECTRIC HYDRAULIC TRASH CAN DUMPER - TCD-M-48-DC

APPROX WEIGHT: 558.01 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS

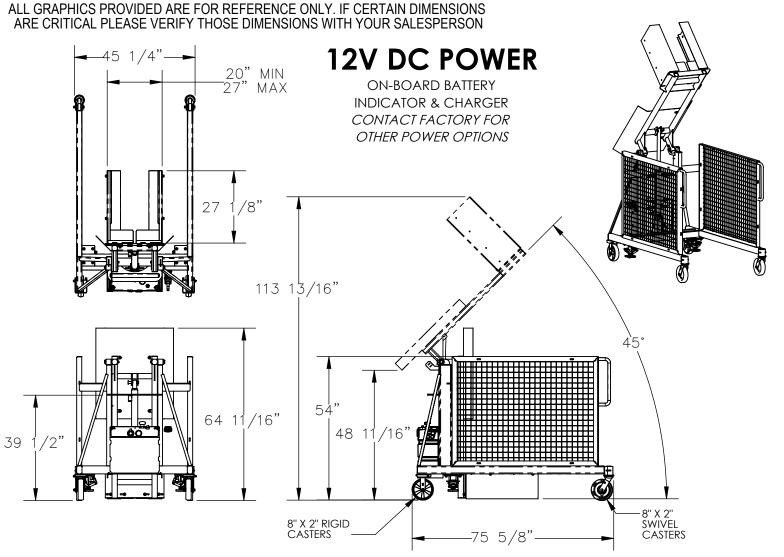

STANDARD FEATURES

MODEL NUMBER: TCD-M-48-DC

USABLE CHUTE WIDTH: 20" MIN TO 27" MAX

USAGE CHUTE LENGTH: 27 1/8 OVERALL LENGTH: 75 5/8"

OVERALL WIDTH: 45 1/4'

OVERALL HEIGHT: 64 11/16"

OVERALL ROTATED HEIGHT: 113 13/16"

MAXIMUM ROTATED ANGLE: 45°

DUMP HEIGHT: 48 11/16

WORKS WITH MODEL# TH-32/64/95

UNIFORM CAPACITY IS 400 LBS

CASTERS:

FRONT: 8" X 2" GFN SWIVEL REAR: 8" X 2" GFN RIGID TWO ADJUSTABLE FLOOR LOCKS INTERNAL POWER UNIT: 12 V DC WITH ON-BOARD CHARGER

HANDHELD PUSH BUTTON CONTROL, W/8ft. EXTENDED COIL CORD

FRAME: DURABLE LIQUID PAINT BLUE FINISH CHUTE: DURABLE BAKED IN POWDER COATED

YELLOW FINISH

SPECIAL FEATURES

NONE

QUOTED LEAD TIME: X

34-007-015

| | | DIMENSION 1 | OLERANCE ± 1/4" |
|-------------|---|--|--|
| A P P R O V | REPRESENTED SATI REQUIREMENTS. I AL CONFIRM PRO COMPLIANCE WITH AND LOCAL REG UNITS REQUIRIN MODIFIED A | DDUCT AND INSTALLA ALL APPLICABLE FED GULATIONS AND STAN G APPROVAL DR ARE NON-RETUR | IMENSION MY DUTY TO ATION ERAL, STATE NDARDS. EAWINGS OR NABLE |
| Α | []ASu | rawn [] As m | aineu |
| A L | Signed: | rawn [] AS m | _Date: |
| A L | | | _Date: |
| L | Signed: | | _Date: |
| DISTRI | Signed: Printed Name: LEAD TIME WILL START UPO BUTOR'S NAME: ESTIL MANUFAC | on receipt of signed CTURING | Date: |
| DISTRI | Signed: Printed Name: LEAD TIME WILL START UP BUTOR'S NAME: | ON RECEIPT OF SIGNED | _Date: |

QUOTE #