
ADJ. STEEL GANTRY CRANE WITH DUAL TIRE PNEUMATIC CASTERS - AHS-4-15-10-PNU

APPROX WEIGHT: 984.50 lbs (DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!)

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

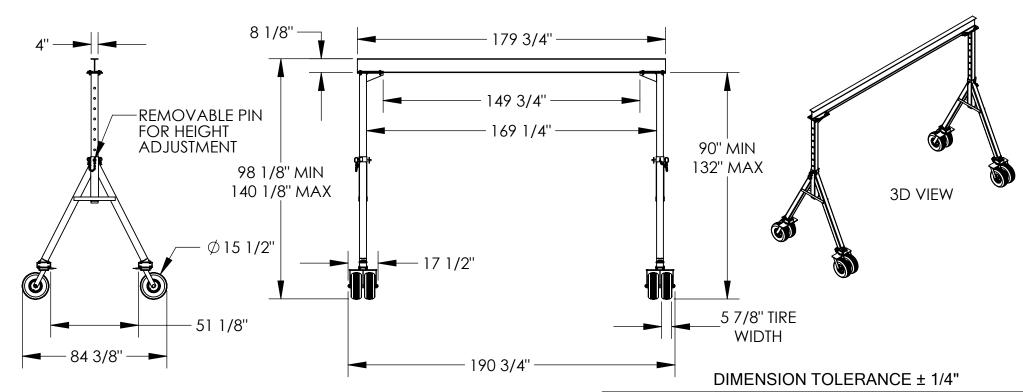

STANDARD FEATURES

MODEL NUMBER IS AHS-4-15-10-PNU CAPACITY IS 4,000 LBS.

BASE WIDTH IS 84 3/8"

MAX OVERALL HEIGHT IS 140 1/8"

I-BEAM HEIGHT IS 8 1/8"

I-BEAM WIDTH IS 4"

OVERALL I-BEAM LENGTH IS 179 3/4"

USABLE I-BEAM LENGTH IS 149 3/4"

ADJUSTABLE UNDER I-BEAM HEIGHT

90" MIN

132" MAX

HEIGHT IS ADJUSTABLE IN 6" INCREMENTS

(4) \emptyset 15 1/2" DUAL TIRE PNEUMATIC CASTERS

(SWIVEL WITH (4) LOCKING POSITIONS)
-PNU MODELS ARE 12" TALLER THAN STANDARD AHS UNITS OF THE SAME HEIGHT DESIGNATION

DURABLE LIQUID PAINT BLUE FINISH

SPECIAL FEATURES

NONE

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION Ρ COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS R UNITS REQUIRING APPROVAL DRAWINGS OR

MODIFIED ARE NON-RETURNABLE [] As drawn [] As marked

Date: Signed:

Printed Name:

	LEAD TIME WILL START UP	'ON RECEIF	OF SIGNED	<u>APPROVAL DRAWIN</u>
	DISTRIBUTOR'S NAME:	P.O.# X		
	VESTIL MANUFACTURING			W.O.# X
L		DATE: 01/	29 / ZUZ I	SALES: X
	REFERENCE: X		SCALE: 1:56	
	QUOTED LEAD TIME: X	QUOTE #		28-007-476