

ALTERNATING TREAD STAIR - ATS-4-56-HDG

APPROX WEIGHT: 125.50 lbs.

DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!
ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE



TOP STEP - SCALE: 1:12

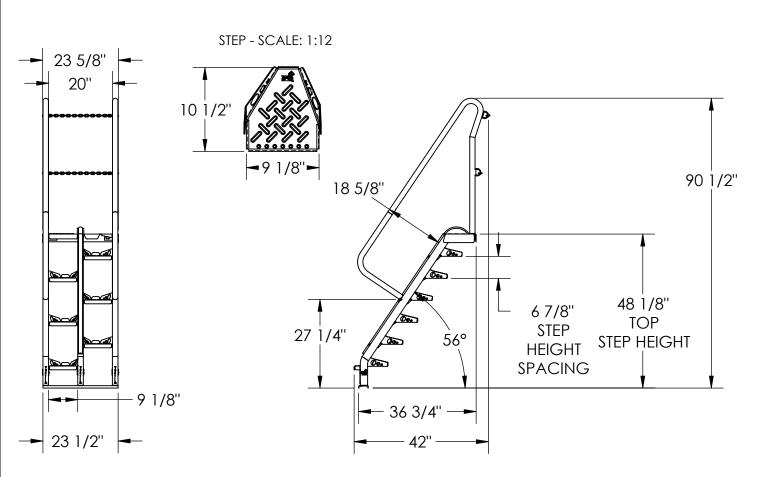

P

P

R

0

٧

A

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

STANDARD FEATURES

MODEL NUMBER: ATS-4-56-HDG

CLIMB ANGLE: 56°

NUMBER OF STEPS: 7 (INCLUDING TOP STEP)

TOP STEP HEIGHT: 48 1/8"

STEP HEIGHT SPACING: 6 7/8" HANDRAIL HEIGHT: 18 5/8"

OVERALL HEIGHT: 18 5/8"

OVERALL HEIGHT: 90 1/2" OVERALL LENGTH: 42"

OVERALL WIDTH: 23 1/2"

CHAIN GATES AT TOP STEP

RUBBER BUMPER STRIP MAX CAPACITY IS 350 LBS

HOT DIPPED GALVANIZED FINISH

HANDRAILS ARE TOUGH BAKED IN POWDER

COATED YELLOW FINISH

SPECIAL FEATURES NONE

	DIMENSION TOLERANCE ± 1/4"
I	I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS
I	REPRESENTED SATISFIES DESIGN AND DIMENSION
I	REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO
I	CONFIRM PRODUCT AND INSTALLATION

COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

[] As drawn [] As marked

Signed:_____Date:___

Printed Name:

Printed Name:				
LEAD TIME WILL START UP	ON RECEIPT (OF SIGNED A	<i>APPROVAL</i>	DRAWING
DISTRIBUTOR'S NAME:			P.O.# X	
VESTIL MANUFAC	W.O.# X			
DRAWN BY: TJH	DATE: 11/17	/2021	SALES: X	
reference: X	SC	ALE: 1:30	FILE NAME:	
QUOTED LEAD TIME: X	QUOTE #		44-007-7	57