
TRACTION DRIVE ELECTRIC HYDRAULIC SCISSOR LIFT CART - CART-500-2033-CTD

APPROX WEIGHT: 372.65 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON.

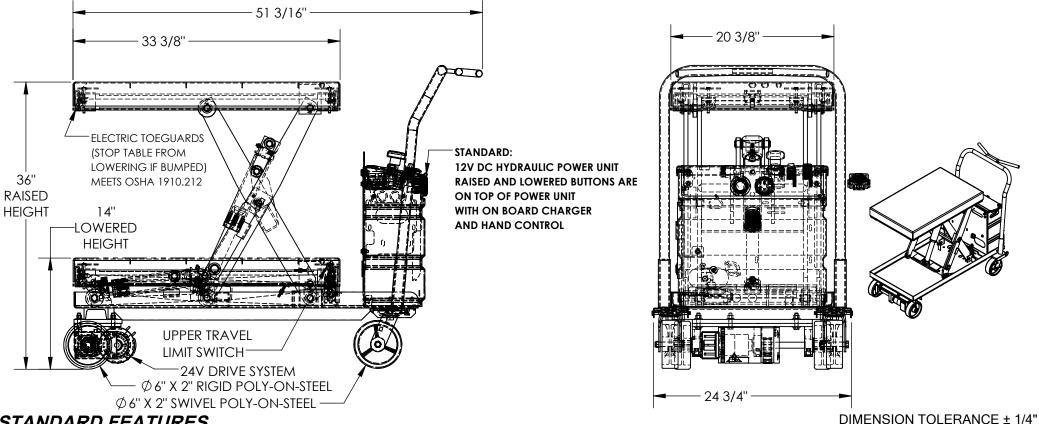

STANDARD FEATURES

MODEL NUMBER IS CART-500-2033-CTD DECK WIDTH IS 20 3/8" DECK LENGTH IS 33 3/8" **RAISED HEIGHT IS 36" LOWERED HEIGHT IS 14"** 6" DRIVE WHEEL Ø 6" X 2" RIGID POLY-ON-STEEL

 \emptyset 6" X 2" SWIVEL POLY-ON-STEEL

TABLE CAPACITY (EVENLY DISTRIBUTED) MAX CAPACITY IS 500 LBS.

CONTROL IS HANDHELD 2 BUTTON, NEMA 4 PENDANT WITH MINIMUM 8' USABLE COIL CORD

SAFETY MAINTENANCE PROPS, DISPLACEMENT STYLE CYLINDERS INSTALLED ROD DOWN EMERGENCY SAFETY STOP HYDRAULIC FUSES

UPPER TRAVEL LIMIT SWITCH **ELECTRIC PINCH POINT GUARD DURABLE LIQUID PAINT BLUE FINISH**

SPECIAL FEATURES NONE

DECK TOLERANCE ±1/2" TABLE HEIGHT TOLERANCES ±1/2"

DECK FLATNESS ±1/4"

POWER

FOR INTERNAL USE ONLY PROJECT SIGN OFF **SALES** ENG. FAB.

Ρ

Ρ

R

0

V

Α

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS

REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ANY MODIFIED UNITS ARE NON-RETURNABLE

[] As drawn [] As marked Signed: Date:

Printed Name: LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTORS	WIL.	
VESTIL	MANUFA	ACTURING

W.O.#

01-007-372

SALES: X DRAWN BY: 10/17/2017 reference: X SCALE: 1:12 FILE NAME:

QUOTED LEAD TIME: χ QUOTE # Χ