GALVANIZED SELF-DUMPING STEEL HOPPER W/ BUMPER RELEASE - D-150-HD-GAL APPROX WEIGHT: 754.90 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!! *** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON **WARNING** THIS PRODUCT CAN EXPOSE YOU TO LEAD, WHICH IS KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER AND BIRTH DEFECTS OR OTHER REPRODUCTIVE 68 3/8" -

DUMPED POSITION

Р


R

0

V

Signed:

Printed Name:

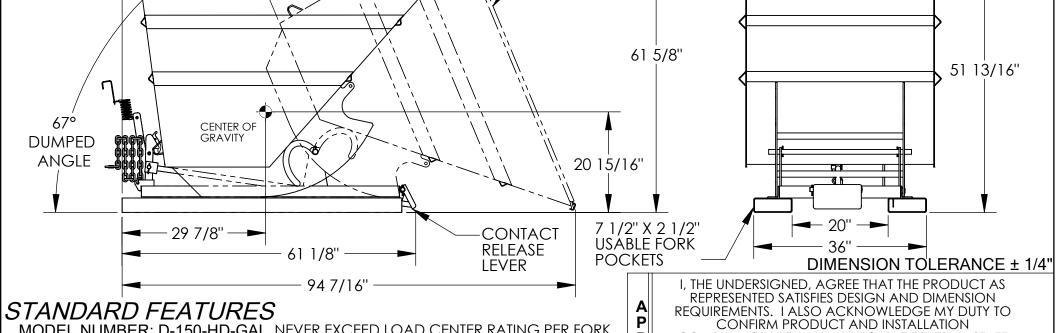

SPECIAL FEATURES NONE

VOLUME: 1 1/2 CU. YDS.

OVERALL WIDTH: 42 9/16"

OVERALL LENGTH: 68 3/8"

OVERALL HEIGHT: 51 13/16"

PULL CABLE IS AT LEAST: 48" FINISH: HOT DIP GALVANIZED

CAPACITY: 6,000 LBS.

APPROX. WEIGHT/ LOST LOAD=754.90 LBS. MINIMUM EFFECTIVE THICKNESS= LESS THAN 1"

LOAD WILL EXCEED FORK TRUCK

TRUCK MANUFACTURER'S GUIDFLINES.

MANUFACTURER'S LOAD CENTER RATING.

DO NOT USE THIS FORK TRUCK ATTACHMENT IF

MODEL NUMBER: D-150-HD-GAL NEVER EXCEED LOAD CENTER RATING PER FORK

VESTIL MANUFACTURING

HARM. FOR MORE INFORMATION GO TO www.p65warnings.ca.gov

- 42 9/16" —

COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE

UNITS REQUIRING APPROVAL DRAWINGS OR

MODIFIED ARE NON-RETURNABLE

AND LOCAL REGULATIONS AND STANDARDS

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING
DISTRIBUTOR'S NAME:

P.O.# ,, W.O.# SALES: X

ADDITION OF CASTERS MAY CHANGE WEIGHT CAPACITY BASED ON CASTER RATING

DRAWN BY: SJG DATE: 2/9<u>/2018</u>

SCALE: 1:20 FILE NAME:

[] As marked

reference: X QUOTED LEAD TIME: Y QUOTF #

[] As drawn

37-007-125-001

Date: