


# DOCK SEAL/SHELTER - D-150/650-18

APPROX WEIGHT: 173.98 lbs.  
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

\*\*\*ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE\*\*\*

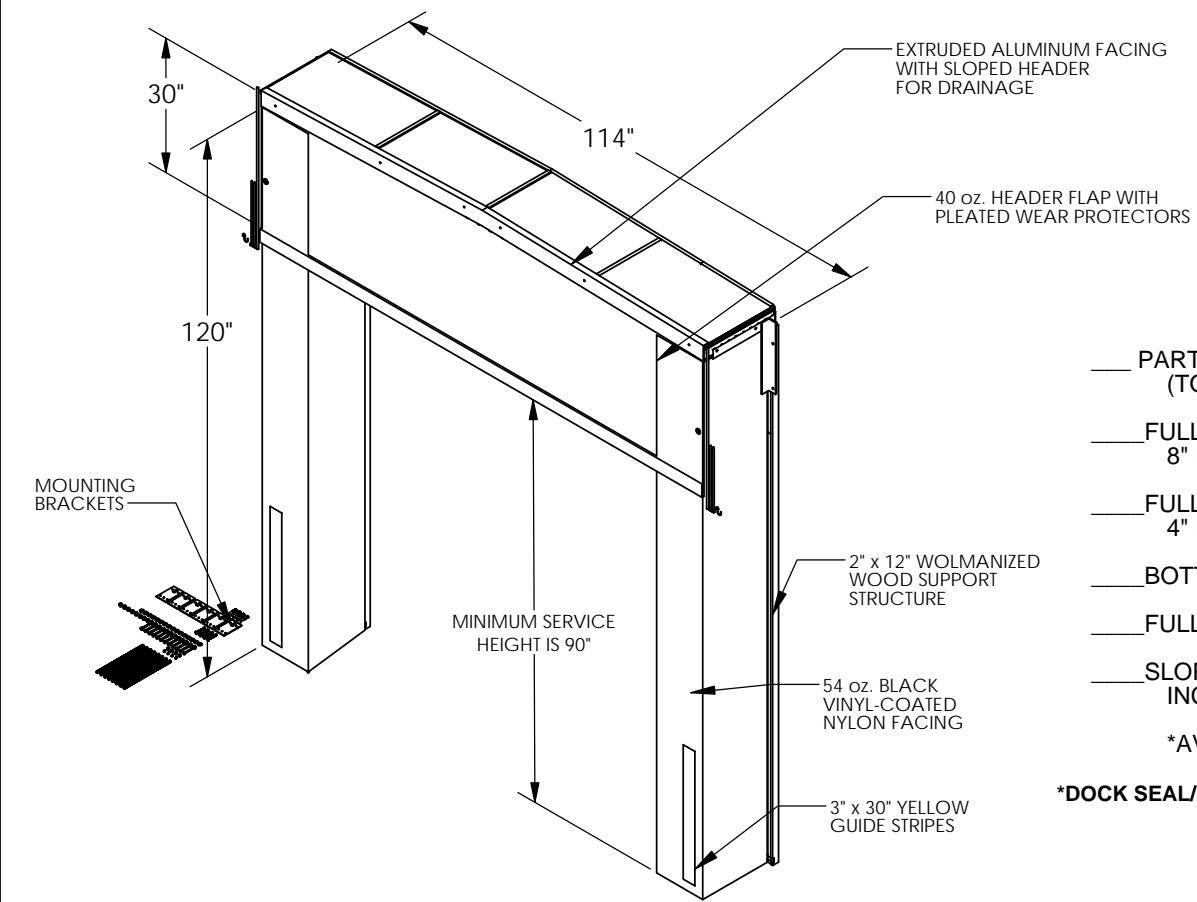


## \*OPTIONS:

- PARTIAL ARMOUR PLEATS (TOP THREE FEET ONLY)
- FULL HEIGHT ARMOUR PLEATS - 8" EXPOSURE WITH 12 1/2" PLEATS
- FULL HEIGHT ARMOUR PLEATS - 4" EXPOSURE WITH 12 1/2" PLEATS
- BOTTOM FOAM BUN/BUMPER PAD
- FULL HEIGHT GUIDE STRIPS
- SLOPED VERTICAL SIDES FOR INCLINED/DECLINED DOCK APPROACH

\*AVAILABLE AT ADDITIONAL COSTS\*

\*DOCK SEAL/SHELTER REPAIR KITS ARE AVAILABLE\*

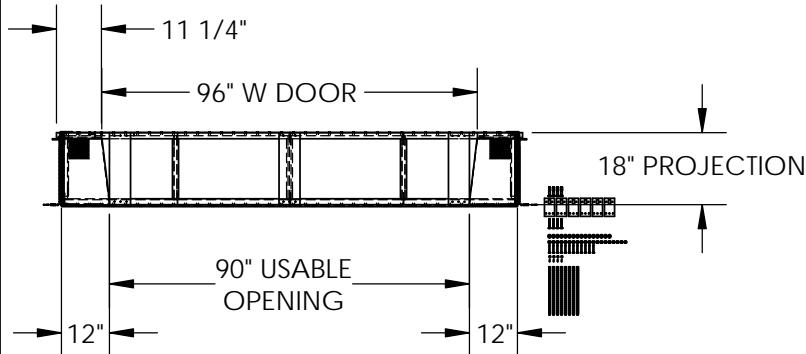

UNIT IS SPECIAL AND  
NON RETURNABLE

FOR INTERNAL USE ONLY PROJECT SIGN OFF	
SALES	
ENG.	
FAB.	
POWER	

DIMENSION TOLERANCE  $\pm 1/4"$

## STANDARD FEATURES

MODEL NUMBER IS D-150/650-18  
DOCK SEAL/SHELTER PROJECTION IS 18"  
DOOR OPENING IS 8 FEET WIDE x 10 FEET HIGH  
DOCK HEIGHT IS 48 INCHES  
COVERING CONSTRUCTED OF SLOPED  
WOLMANIZED WOOD WITH ALUMINUM TRIM  
30" HIGH FLAP CONSTRUCTED OF 40 OZ BLACK  
VINYL-COATED NYLON  
SEAL SIDES ARE FILLED WITH HIGH DENSITY  
POLYURIDHANE FOAM  
2" x 12" WOLMANIZED LUMBER SUPPORTING  
STRUCTURE

## SPECIAL FEATURES

NONE

\*\*ANY ADDITIONS, DELETIONS, OR OMISSIONS  
MUST BE CORRECTED ON THIS DRAWING, AS  
THIS WILL BE CONSIDERED ALL INCLUSIVE. \*\*

APPROVAL	I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.		
	ANY MODIFIED UNITS ARE NON-RETURNABLE		
[ ] As drawn		[ ] As marked	
Signed: _____		Date: _____	
Printed Name: _____			
LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING			
DISTRIBUTOR'S NAME:		P.O.# X	
VESTIL MANUFACTURING		W.O.# X	
DRAWN BY: BCN		DATE: 5/5/2016	
REFERENCE: X		SALES: X	
SCALE: 1:35		FILE NAME:	
QUOTED LEAD TIME: X		QUOTE # X	
		35-007-046	