


# HYDRAULIC POWERED HOPPER - D-250-HD-HYD

APPROX WEIGHT: 931.19 lbs.  
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\*

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

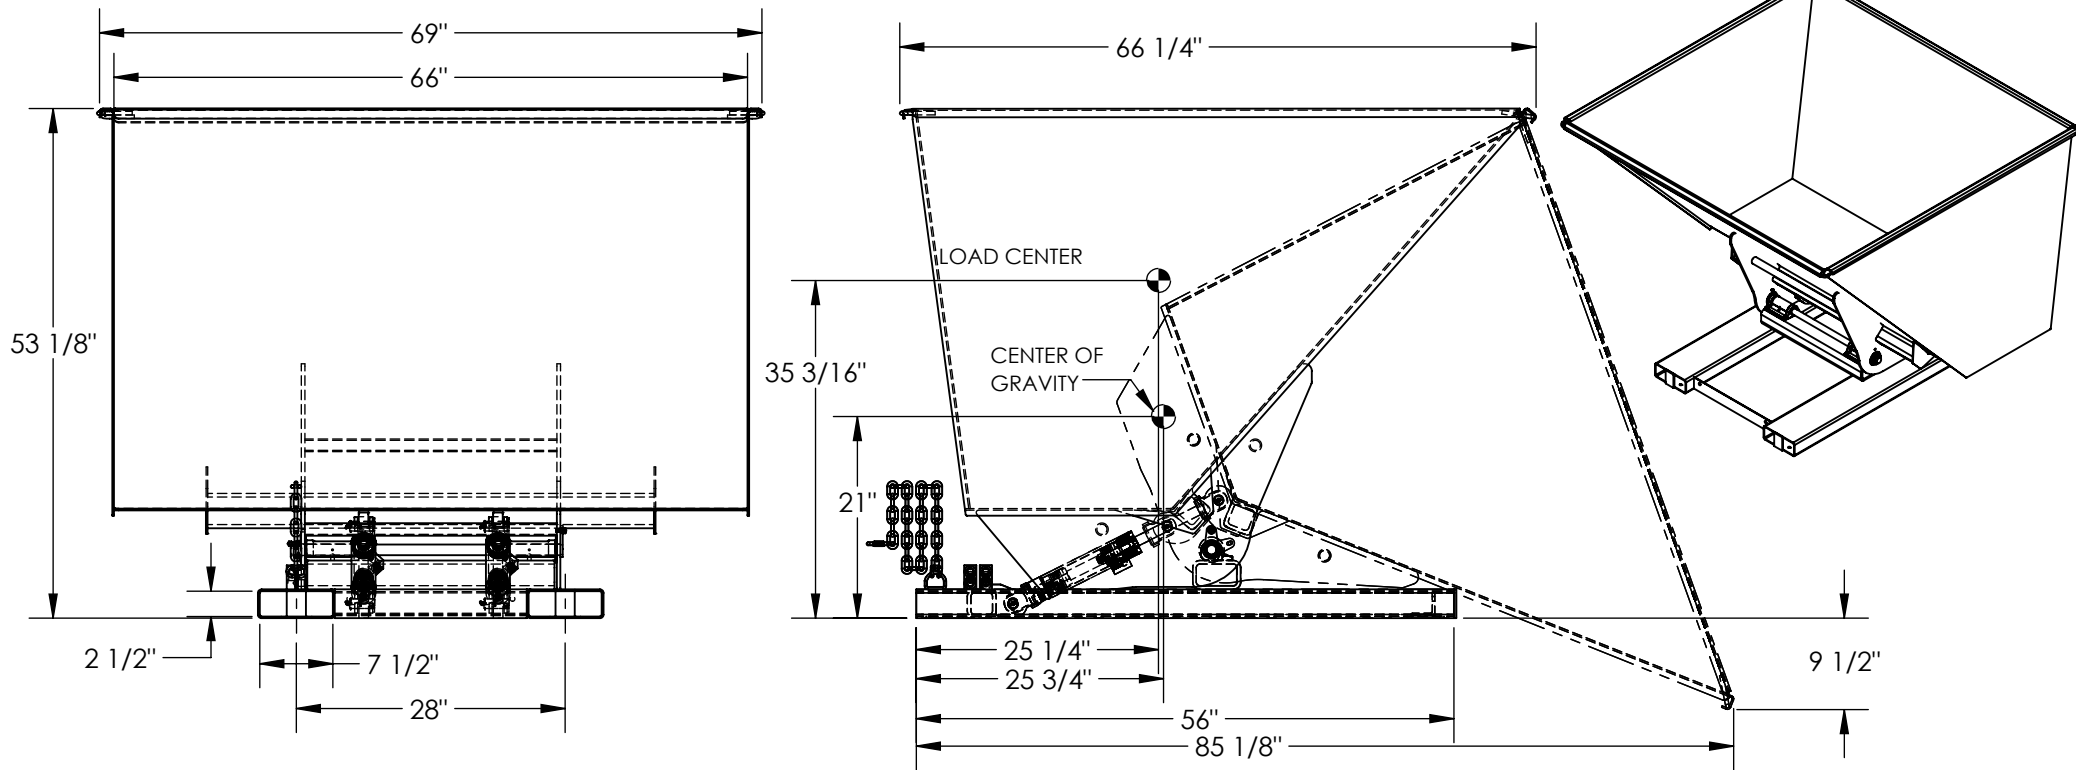

DIMENSION TOLERANCE ± 1/4"

APPROX. WEIGHT / LOST LOAD = 931.19 LBS.  
MINIMUM EFFECTIVE THICKNESS = LESS THAN 1"  
NEVER EXCEED LOAD CENTER  
RATING PER FORKTRUCK  
MANUFACTURERS GUIDELINES.  
DO NOT USE THIS FORK TRUCK  
ATTACHMENT IF LOAD WILL  
EXCEED FORK TRUCK MANUFACTURER'S  
LOAD CENTER RATING

## STANDARD FEATURES

MODEL NUMBER IS D-250-HD-HYD  
OVERALL WIDTH IS 69"  
OVERALL LENGTH IS 66 1/4"  
OVERALL HEIGHT IS 53 1/8"  
MAX CAPACITY IS 6,000 LBS.  
VOLUME IS 2.5 CU. YRDS.  
FORK POCKETS ARE 7 1/2" x 2 1/2"  
USABLE ON 28" CENTERS  
HYDRAULIC POWERED DUMPING AND RETURNING OF HOPPER  
FORK LIFT AUXILIARY CONNECTIONS ARE REQUIRED  
TOUGH BAKED IN POWDER COATED BLUE FINISH

## SPECIAL FEATURES

NONE

<b>APPROVAL</b>	I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.	
	<b>UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE</b>	
	[ ] As drawn      [ ] As marked	
	Signed: _____	Date: _____
Printed Name: _____		
LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING		

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
DRAWN BY: JWW		W.O.#
DATE: 8/30/2021		X
REFERENCE: X	SCALE: 1:20	SALES: X
QUOTED LEAD TIME: X	QUOTE # X	FILE NAME:
		37-007-167