
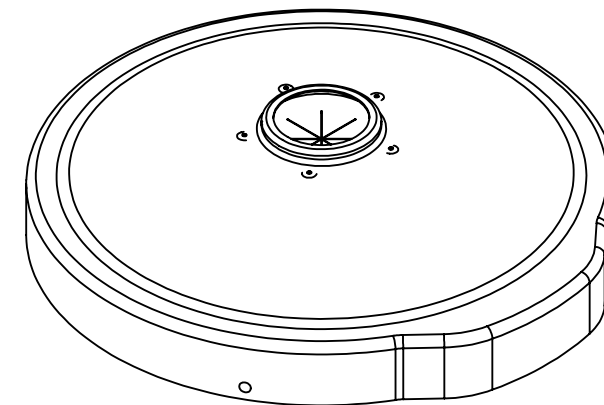


DOMED RECYCLING LID W/ FLAPS- DC-P-55-CANF-UF-RD

APPROX WEIGHT: 3 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!


*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

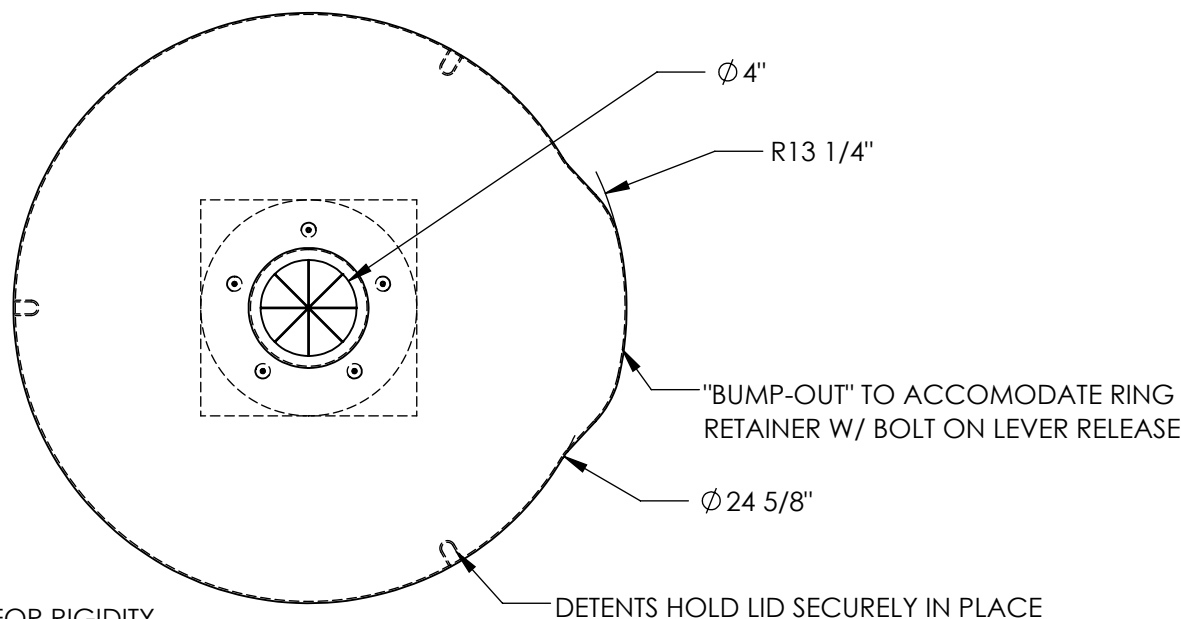

DOMED LID FOR RIGIDITY
AND WEATHER DEFLECTION

DETENTS HOLD LID SECURELY IN PLACE

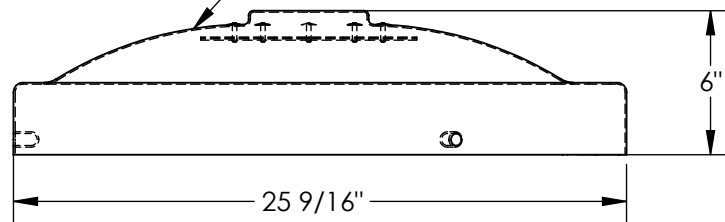

25 9/16"

DIMENSION TOLERANCE $\pm 1/4"$

STANDARD FEATURES

MODEL NUMBER IS DC-P-55-CANF-UF-RD
OVERALL DIAMETER IS $\phi 24 \frac{5}{8}"$
OVERALL LENGTH IS 25 9/16"
OVERALL HEIGHT IS 6"
DIAMETER OF HOLE IS 4"
FLAPS DISCOURAGE REMOVAL OF CONTENTS
MADE FROM LOW-DENSITY POLYETHYLENE
DETENTS HOLD LID SECURELY IN PLACE
DOMED LID FOR RIGIDITY AND WEATHER DEFLECTION
"BUMP-OUT" ON OUTER DIAMETER WILL ACCOMODATE RING RETAINER
W/ BOLT OR INSIDE OR OUTSIDE LEVER RELEASE
COLOR IS RED
WORKS WITH 55 GALLON, CLOSED OR OPEN HEAD DRUMS

SPECIAL FEATURES

NONE

APPROVAL

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

[] As drawn [] As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

FOR INTERNAL USE ONLY
PROJECT SIGN OFF

SALES	
ENG.	
FAB.	
POWER	

DISTRIBUTOR'S NAME:

VESTIL MANUFACTURING

DRAWN BY: NBE

DATE: 7/24/2020

REFERENCE: X

SCALE: 1:8

QUOTED LEAD TIME: X

QUOTE # X

P.O.# X

W.O.# X

SALES: X

FILE NAME:

31-007-251-002