## **ELECTRIC HYDRAULIC DOCKLEVELER - EH-610-20**

APPROX WEIGHT: 2267 lbs.

DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!

20"

**RECOMMENDED** 

CURB ANGLE 3" x 3"


x 1/4" ANGLE WITH 6" ANCHORS

INSTALLATION:

-AVAILABLE AS

06-007-023

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\* ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

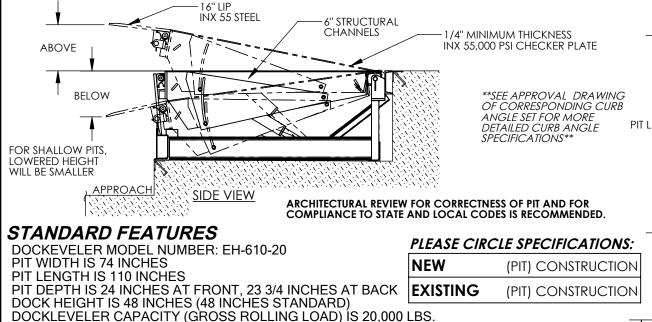

ALL STRUCTURAL STEEL CONSTRUCTION WELDING MEETS AWS.

\*\*\*SINGLE AXLE CAPACITY NOT TO EXCEED 70% OF LOAD\*\*\*

DESIGN, ENGINEERING, AND FABRICATION COMPLIES WITH OSHA & ANSI MH30.1

INCLUDES (2) 1014-4.5 LAMINATED DOCK BUMPERS

-REFER TO THE UNIT'S ELECTRICAL DIAGRAM FOR ELECTRICAL SERVICE REQUIREMENTS.


 - INSTALL TO MEET ALL APPLICABLE STATE & LOCAL CODES FOR YOUR AREA! -NOTE: REFER TO THE APPROPRIATE ELECTRICAL CIRCUIT DIAGRAM (FOUND IN THE OWNER'S MANUAL) FOR REQUIRED WIRING TO COMPLETE INSTALLATION (SOME WIRING TO BE SUPPLIED BY OTHERS.)


VERTICAL SERVICE RANGE IS 12 INCHES ABOVE AND 12 INCHES BELOW DOCK

DURABLE LIQUID PAINT BROWN FINISH WITH YELLOW DECK SIDES & TOE GUARDS

## SPECIAL FEATURES

NONE

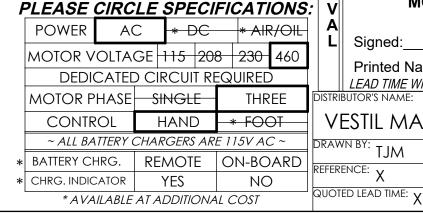

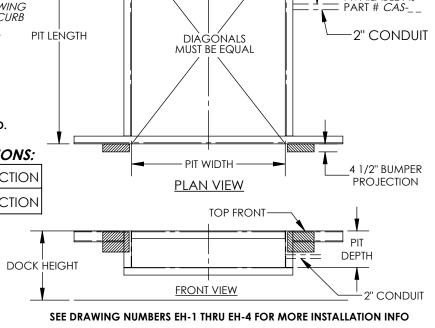

REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS

[ ] As drawn [ ] As marked Signed: Date:

**Printed Name:** LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

Ρ

Ρ

R

0

DISTRIBUTOR'S NAME: VESTIL MANUFACTURING W.O.# SALES: X DRAWN BY: MLT 05/18/11 REFERENCE: X FILE NAME: SCALE: NTS

QUOTE #

Χ

DIMENSION TOLERANCE ± 1/4"