
ELECTRIC HYDRAULIC SCISSOR LIFT TABLE - EHLT-24102-1-79

APPROX WEIGHT: 1409.77 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

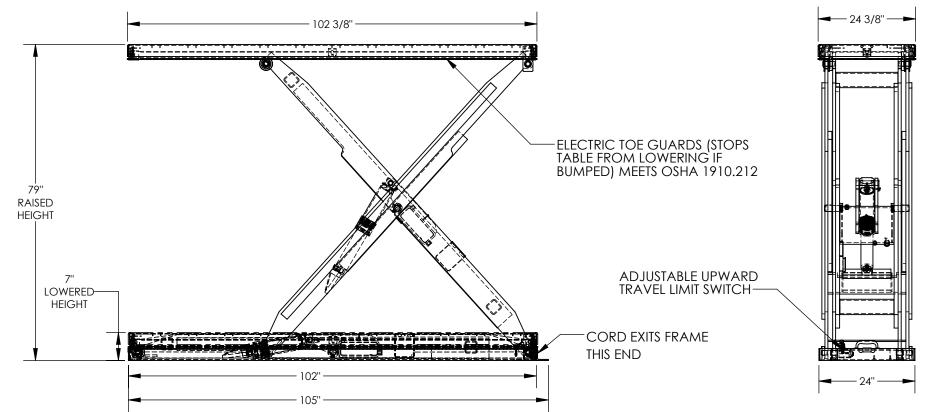

STANDARD FEATURES

MODEL NUMBER IS EHLT-24102-1-79 PLATFORM WIDTH IS 24 3/8" PLATFORM LENGTH IS 102 3/8" PLATFORM RAISED HEIGHT IS 79" PLATFORM LOWERED HEIGHT IS 7" TABLE CAPACITY (EVENLY DISTRIBUTED) LOAD IS 1,000 LBS INTERNAL POWER UNIT STANDARD CONTROL IS 24 VOLT CONTROL IS HANDHELD, 2 BUTTON, NEMA 4 PENDANT WITH MINIMUM 8' USABLE COIL CORD SAFETY MAINTENANCE PROPS, DISPLACEMENT STYLE CYLINDERS INSTALLED ROD DOWN **EMERGENCY SAFETY STOP HYDRAULIC FUSES** IN ALL CYLINDERS UNITS HAVE 2' TEST LEAD AND PIG TAIL **DURABLE LIQUID PAINT BLUE FINISH**

SPECIAL FEATURES

NONE

DECK TOLERANCE± 1/2"
TABLE HEIGHT TOLERANCE ± 1/2"
DECK FLATNESS ± 1/4"

Ρ

R

0

POWER	OWER AC		DC (12V)		AIR/OIL		
MOTOR V	OLTA	GE -	115	208	}	230	460
DEDICATED CIRCUIT REQUIRED 60Hz							
MOTOR PHASE SI		NGLE 			THREE		
CONTROL		H	HAND -				

DIMENSION TOLERANCE ±1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

[] As drawn [] As marked

Signed:	Date:			
Deints of Names				

Printed Name:_____ LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWIN

	LEAD TIME WILL START UP	<u>'ON RECEIPT OF SIC</u>	GNED APPROVAL DRAWING
	STRIBUTOR'S NAME:		P.O.# X
	vestil manufac	_	W.O.# X
DF	RAWN BY: BCN	DATE: 10/11/201	7 SALES: X
RE	FERENCE: X	SCALE:	1:24 FILE NAME:
QI	JOTED LEAD TIME: χ	QUOTE # X	24-007-401-001