
ELECTRIC HYDRAULIC SCISSOR LIFT TABLE - EHLT-2464-1-55

APPROX WEIGHT: 703.45 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON.

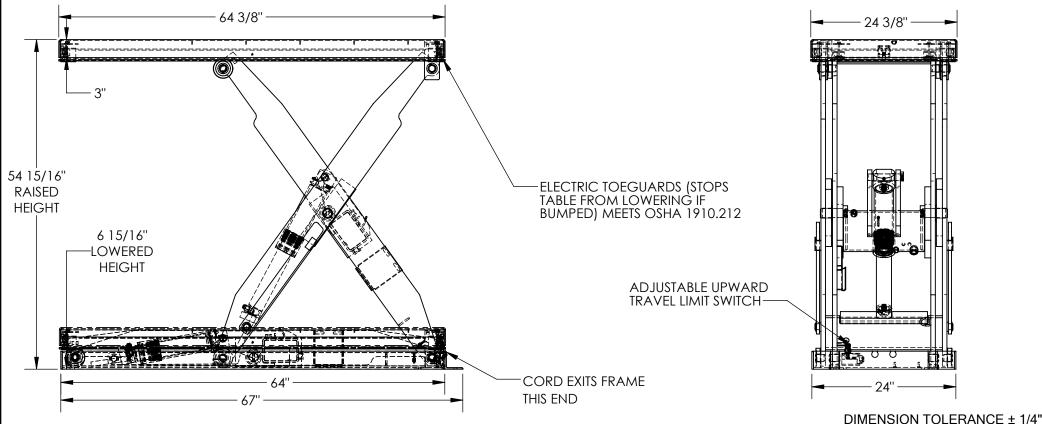

STANDARD FEATURES

MODEL NUMBER IS EHLT-2464-1-55 PLATFORM WIDTH IS 24 3/8" PLATFORM LENGTH IS 64 3/8" **OVERALL LENGTH IS 67"** PLATFORM RAISED HEIGHT IS 55" PLATFORM LOWERED HEIGHT IS 7" TABLE CAPACITY (EVENLY DISTRIBUTED) LOAD IS 1,000 LBS INTERNAL POWER UNIT CONTROL IS HANDHELD, 2 BUTTON, NEMA 4 PENDANT WITH MINIMUM 8' USABLE COIL CORD SAFETY MAINTENANCE PROPS, DISPLACEMENT STYLE CYLINDERS INSTALLED ROD DOWN EMERGENCY SAFETY STOP HYDRAULIC FUSES IN ALL CYLINDER UNITS HAVE 2' TEST LEAD AND PIG TAIL **DURABLE LIQUID PAINT BLUE FINISH**

SPECIAL FEATURES

NONE

PLEASE CIRCLE SPECIFICATIONS! P

LEAGE GINGLE OF LOW TOATTONG.						
POWER	AC	DC) (12∀) Alf	NOIL	
MOTOR V	OLTAGE	115	208	230	460	
DEDICATED CIRCUIT REQUIRED 60Hz						
MOTOR P	HASE -	SINGLE		THREE		
CONTR	OL	HAND •		F00T		

DECK TOLERANCE ± 1/2" TABLE HEIGHT TOLERANCE ± 1/2" DECK FLATNESS ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.
UNITS REQUIRING APPROVAL DRAWINGS OR

MODIFIED ARE NON-RETURNABLE

Signed:

Printed Name:_____

ļ	LEAD TIME WILL STA	ART UPON RECEIPT OF SIGNI	ED APPROVAL DRAWING
	DISTRIBUTOR'S NAME:		P.O.# X
	VESTIL MANU	W.O.# X	
ı	DRAWN BY: BCN	DATE: 8/23/2017	SALES: X
F	reference: X	SCALE: 1:	16 FILE NAME:
	QUOTED LEAD TIME: X	QUOTE # X	24-007-151-001