
ELECTRIC HYDRAULIC SCISSOR LIFT TABLE - EHLT-2464-2-55

APPROX WEIGHT: 713.67 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

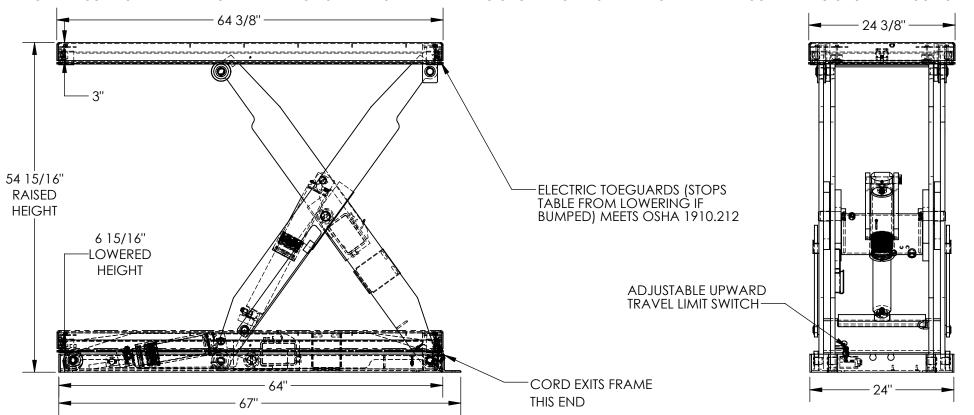

STANDARD FEATURES

MODEL NUMBER IS EHLT-2464-2-55 PLATFORM WIDTH IS 24 3/8" PLATFORM LENGTH IS 64 3/8" **OVERALL LENGTH IS 67"** PLATFORM RAISED HEIGHT IS 55" PLATFORM LOWERED HEIGHT IS 7" TABLE CAPACITY (EVENLY DISTRIBUTED) LOAD IS 2,000 LBS INTERNAL POWER UNIT CONTROL IS HANDHELD, 2 BUTTON, NEMA 4 PENDANT WITH MINIMUM 8' USABLE COIL CORD SAFETY MAINTENANCE PROPS, DISPLACEMENT STYLE CYLINDERS INSTALLED ROD DOWN EMERGENCY SAFETY STOP HYDRAULIC FUSES IN ALL CYLINDER UNITS HAVE 2' TEST LEAD AND PIG TAIL **DURABLE LIQUID PAINT BLUE FINISH**

SPECIAL FEATURES

NONE

PLEASE CIRCLE SPECIFICATIONS P

•	LLAUL		、	<i>J. L</i>			~,,	0,10	" "	П
	POWER	AC		DC	: (12	∀)	Alf	YOIL	R	2
	MOTOR V	OLTAC	E H	15	208	- 2	30	460	V	1
	DEDICA	DEDICATED CIRCUIT REQUIRED 60Hz								
	MOTOR PHASE SI			NGLE			THREE		-	1
	CONTROL H		ANE) -		FO()			

DECK TOLERANCE ± 1/2" TABLE HEIGHT TOLERANCE ± 1/2" DECK FLATNESS ± 1/4"

DIMENSION TOLERANCE ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS

UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

[] As marked

Signed:

Printed Name:

	LEAD TIME WILL START UP	ON RECEIF	PT OF SIGNED	<u>APPROVAL DRAWING</u>
	DISTRIBUTOR'S NAME:			P.O.# X
	VESTIL MANUFAC	W.O.# X		
Ē	BCN	DATE: 8/2	3/2017	SALES: X
R	reference: X		SCALE: 1:16	
	QUOTED LEAD TIME: X	QUOTE #		24-007-161-001