
ELECTRIC HYDRAULIC SCISSOR TABLE - EHLT-3696-5-56

APPROX WEIGHT: 1309.63 lbs.

DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

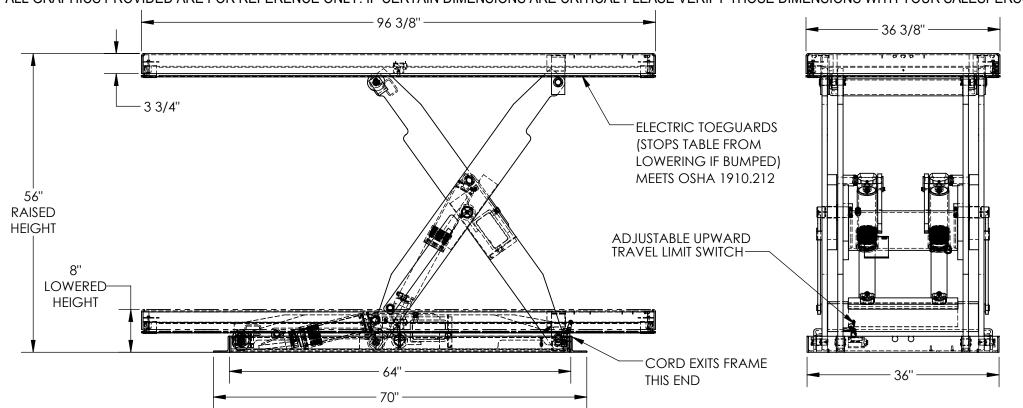

STANDARD FEATURES

MODEL NUMBER IS EHLT-3696-5-56 PLATFORM LENGTH IS 96 3/8" PLATFORM WIDTH IS 36 3/8" PLATFORM RAISED HEIGHT IS 56" PLATFORM LOWERED HEIGHT IS 8" TABLE CAPACITY (EVENLY DISTRIBUTED) IS 5.000LBS INTERNAL POWER UNIT CONTROL IS HANDHELD, 2 BUTTON, NEMA 4 PENDANT WITH MINIMUM 8' USABLE COIL CORD SAFETY MAINTENANCE PROPS DISPLACEMENT STYLE CYLINDERS INSTALLED **ROD DOWN** EMERGENCY SAFETY STOP HYDRAULIC FUSES IN ALL CYLINDERS UNITS HAVE 2' TEST LEAD AND PIG TAIL DURABLE LIQUID PAINT BLUE FINISH

SPECIAL FEATURES

NONE

PLEASE CIRCLE SPECIFICATIONS:

1	?/OIL) AIF	12 V	C		<u> </u>	A	POWER	
	460	230	08) 2	115	GE	OLTA	NOTOR V	1
	DEDICATED CIRCUIT REQUIRED 60Hz								
	EE	THREE		OR PHASE SINGLE		MOTOR F	1		
1) T	FOC		HAND		H	CONTROL		
1									_

DECK TOLERANCE± 1/2"
TABLE HEIGHT TOLERANCE ± 1/2"
DECK FLATNESS ± 1/4"

DIMENSION TOLERANCE ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE [] As drawn [] As marked

Signed: Date:

Printed Name:

_		LEAD TIME WIL	L START UP	ON RECEI			DRAWIN
	DISTRI	BUTOR'S NAME:	P.O.# X				
		ESTIL MAI	W.O.# X				
- 1		^{/N BY:} BCN		DATE: 10/	Z6/ZU1/	SALES: X	
F	REFER	ENCE: X			SCALE: 1:18		
	TOUE	ED LEAD TIME: X		QUOTE #		24-007-7	61-003