
ELECTRIC HYDRAULIC SCISSOR LIFT TABLE - EHLT-4872-3-55

APPROX WEIGHT: 1010.40 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON.

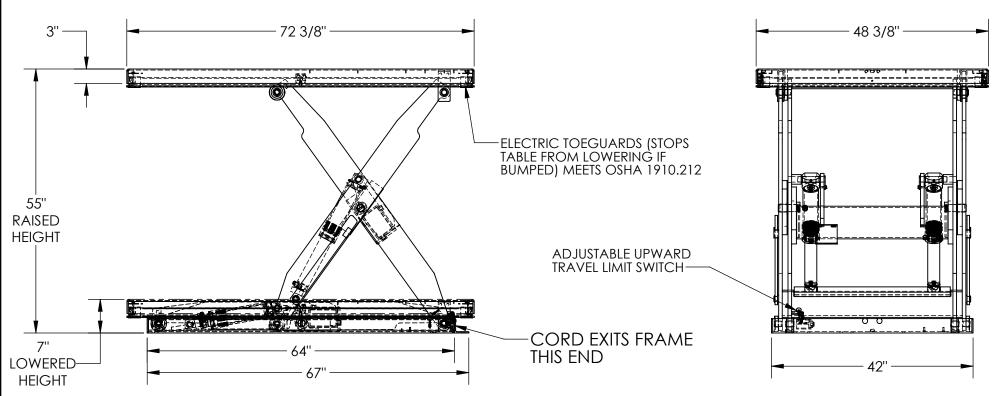

DIMENSION TOLERANCE ± 1/4"

STANDARD FEATURES

MODEL NUMBER IS EHLT-4872-3-55 TABLE CAPACITY (EVENLY DISTRIBUTED) LOAD IS 3,000 LBS PLATFORM WIDTH IS 48 3/8" PLATFORM LENGTH IS 72 3/8" PLATFORM RAISED HEIGHT IS 55" PLATFORM LOWERED HEIGHT IS 7" STANDARD CONTROL IS 24 VOLT INTERNAL POWER UNIT CONTROL IS HANDHELD, 2 BUTTON, NEMA 4 PENDANT WITH MINIMUM 8' USABLE COIL CORD SAFETY MAINTENANCE PROPS, DISPLACEMENT STYLE CYLINDER INSTALLED ROD DOWN **EMERGENCY SAFETY STOP HYDRAULIC FUSES** IN ALL CYLINDERS UNITS HAVE 2' TEST LEAD AND PIG TAIL **DURABLE LIQUID PAINT BLUE FINISH**

SPECIAL FEATURES **NONE**

PLEASE	CIRCL	E ,	SPE	CII	-/(<i>A I I</i>	UNS
POWER	AC	•	DC	(12	2∀)	Alf	R/OIL
MOTOR V	OLTAGI	= -	115	208	3	230	460
DEDICATED CIRCUIT REQUIRED 60Hz							
MOTOR P	HASE	ASE SINC		IGLE 		THREE	
CONTR	OL.	HAND)	ГООТ		

DECK TOLERANCE ± 1/2" TABLE HEIGHT TOLERANCE ± 1/2" DECK FLATNESS ± 1/4"

	I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS
	REPRESENTED SATISFIES DESIGN AND DIMENSION
Α	REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO
Р	CONFIRM PRODUCT AND INSTALLATION
Р	COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE
R	AND LOCAL REGULATIONS AND STANDARDS.
	AND LOCAL REGULATIONS AND STANDARDS. UNITS REQUIRING APPROVAL DRAWINGS OR
0	MODIFIED ARE NON-RETURNABLE
V	
Δ	[] As drawn
'n	Signed: Date:
-	SignedDateDate.

	LEAD TIME WILL	START UPON RECEIPT OF SIGN	IED APPROVAL DRAWING
C	DISTRIBUTOR'S NAME:		P.O.# X
	VESTIL MAN	w.o.# X	
C	DRAWN BY: BCN	DATE: 08/24/2017	, SALES: X
R	reference: X	SCALE: 1:	:20 FILE NAME:
G	QUOTED LEAD TIME: X	QUOTE #	24-007-251-001

Printed Name: