
## **ELECTRIC HYDRAULIC SCISSOR LIFT TABLE - EHLT-4896-2-55**

APPROX WEIGHT: 1095 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\* ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

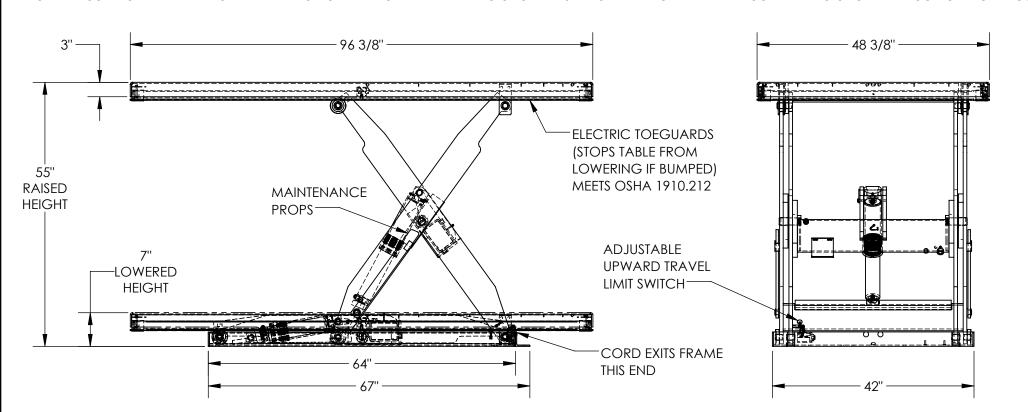

## STANDARD FEATURES

MODEL NUMBER IS EHLT-4896-2-55 PLATFORM LENGTH IS 96 3/8" PLATFORM WIDTH IS 48 3/8" PLATFORM RAISED MAX HEIGHT IS 55" PLATFORM LOWERED MIN HEIGHT IS 7" OVERALL LENGTH IS 96 3/8" USABLE LENGTH IS 96 3/8" OVERALL WIDTH IS 48 3/8" USABLE WIDTH IS 48 3/8" TABLE CAPACITY (EVENLY DISTRIBUTED) LOAD IS 2,000 LBS INTERNAL PÓWER UNIT 2 HP MOTOR (@ 3 PHASE) 3/4 HP MOTOR (@ 1 PHASE) CONTROL IS HANDHELD, 2 BUTTON, NEMA 4 PENDANT WITH MINIMUM 8' USABLE COIL CORD SAFETY MAINTENANCE PROPS DISPLACEMENT STYLE CYLINDER **INSTALLED ROD DOWN EMERGENCY SAFETY STOP HYDRAULIC FUSE** IN EACH CYLINDER UPPER TRAVEL LIMIT SWITCH ELECTRIC PINCH POINT GUARD UNITS HAVE 2' TEST LEAD AND PIG TAIL DURABLE LIQUID PAINT BLUE FINISH

## PLEASE CIRCLE SPECIFICATIONS: **POWER** MOTOR VOLTAGE 115 DEDICATED CIRCUIT REQUIRED 60Hz MOTOR PHASE THREE CONTROL **HAND**

## SPECIAL FEATURES

NONE

DIMENSION TOLERANCE ± 1/4" I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO

CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS UNITS REQUIRING APPROVAL DRAWINGS OR

MODIFIED ARE NON-RETURNABLE [ ] As drawn I As marked

Signed: Printed Name:

Ρ

Ρ

R

0

V

Α

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING DISTRIBUTOR'S NAME: W.O.# X VESTIL MANUFACTURING

DRAWN BY: CMP SALES: X DATE: 05/25/2023

SCALE: 1:20 FILE NAME: QUOTED LEAD TIME: XX WEEKS QUOTE# 24-007-201-002