
TANDEM ELECTRIC HYDRAULIC SCISSOR LIFT TABLE - EHLT-TL-48144-2-46 APPROX WEIGHT: 1974.30 lbs.

Does not include weight of power or packaging!! \*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\* ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON 48 3/8"

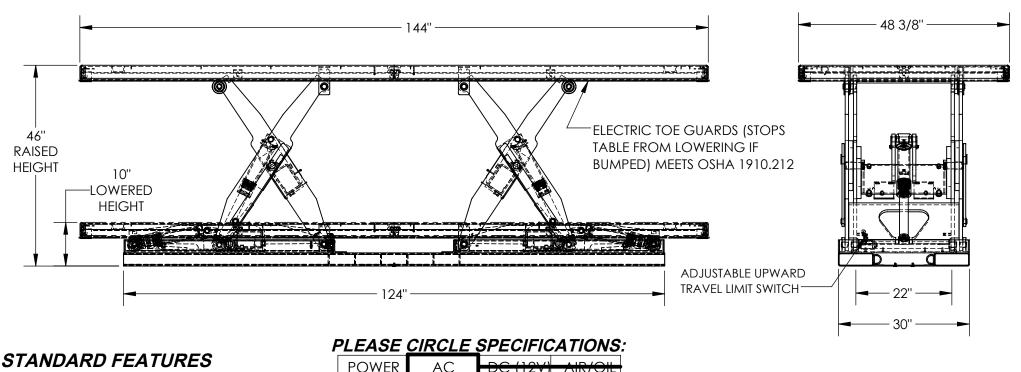

MODEL NUMBER IS EHLT-TL-48144-2-46 PLATFORM WIDTH: 48 3/8" PLATFORM LENGTH: 144" PLATFORM RAISED HEIGHT: 46" PLATFORM LOWERED HEIGHT: 10" TABLE CAPACITY (EVENLY DISTRIBUTED) LOAD: 2.000 LBS.

INTERNAL POWER UNIT CONTROL IS HANDHELD, 2 BUTTON, NEMA 4 PENDANT WITH MINIMUM 8' USABLE COIL CORD SAFETY MAINTENANCE PROPS, DISPLACEMENT STYLE CYLINDERS INSTALLED ROD DOWN **EMERGENCY SAFETY STOP HYDRAULIC FUSES** 

IN ALL CYLINDERS UNITS HAVE 2' TEST LEAD AND PIG TAIL 460V AC. REMOTE 3 PHASE POWER UNIT **DURABLE LIQUID PAINT BLUE FINISH** 

## SPECIAL FEATURES

NONE

## DIMENSION TOLERANCE ± 1/4" MOTOR VOLTAGE 115 208 I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS DEDICATED CIRCUIT REQUIRED 60Hz REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO MOTOR PHASE **THREE** Р CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS. CONTROL **HAND** P R UNITS REQUIRING APPROVAL DRAWINGS OR 0 MODIFIED ARE NON-RETURNABLE [ ] As drawn [ ] As marked Signed: Date: **Printed Name:** LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

VESTIL MANUFACTURING

W.O.# X

SALES: X

24-007-987

SCALE: 1:22 FILE NAME:

DATE: 09/08/2022

QUOTE #

Χ

DISTRIBUTOR'S NAME:

DRAWN BY: CRA

QUOTED LEAD TIME: Y

reference: X