
TANDEM ELECTRIC HYDRAULIC SCISSOR LIFT TABLE - EHLT-TL-48180-2-58 DOES NOT INCLUDE WEIGHT: 2416.57 lbs. \*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\* ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

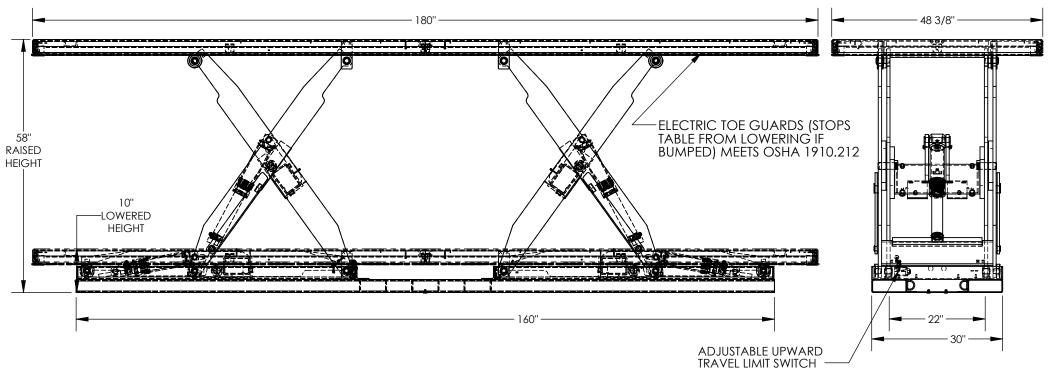

PLEASE CIRCLE SPECIFICATIONS.

DEDICATED CIRCUIT REQUIRED 60Hz

**HAND** 

**POWER** 

MOTOR VOLTAGE 115

MOTOR PHASE

CONTROL

## STANDARD FEATURES

MODEL NUMBER IS EHLT-TL-48180-2-58 PLATFORM WIDTH: 48 3/8" PLATFORM LENGTH: 180" PLATFORM RAISED HEIGHT: 58" PLATFORM LOWERED HEIGHT: 10" TABLE CAPACITY (EVENLY DISTRIBUTED) LOAD: 2.000 LBS INTERNAL POWER UNIT CONTROL IS HANDHELD, 2 BUTTON, NEMA 4

SAFETY MAINTENANCE PROPS, DISPLACEMENT STYLE CYLINDERS INSTALLED ROD DOWN EMERGENCY SAFETY STOP HYDRAULIC FUSES IN ALL CYLINDERS UNITS HAVE 2' TEST LEAD AND PIG TAIL

PENDANT WITH MINIMUM 8' USABLE COIL CORD

460V AC, REMOTE 3 PHASE POWER UNIT **DURABLE LIQUID PAINT BLUE FINISH** 

## SPECIAL FEATURES

NONE

## DIMENSION TOLERANCE ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION
COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE
AND LOCAL REGULATIONS AND STANDARDS.

## UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE [ ] As drawn [ ] As marked

24-007-989

Signed: Date:

**Printed Name:** LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

Ρ

Ρ

R

0

٧

**THREE** 

DISTRIBUTOR'S NAME:

W.O.# X SALES: X DRAWN BY: 09/08/2022

reference: X SCALE: 1:22 FILE NAME:

QUOTED LEAD TIME: X QUOTE #