
DOUBLE SCISSOR LIFT TABLE - EHLTD-4864-5-84

APPROX WEIGHT: 1683.06 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

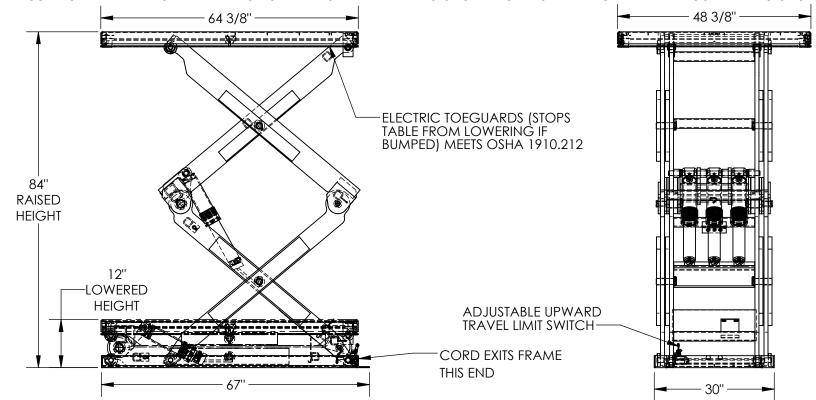

DIMENSION TOLERANCE ± 1/4"

Ρ

STANDARD FEATURES

MODEL NUMBER IS EHLTD-4864-5-84 PLATFORM WIDTH: 48 3/8" PLATFORM LENGTH: 64 3/8" PLATFORM RAISED HEIGHT: 84" PLATFORM LOWERED HEIGHT: 12" CAPACITY (EVENLY DISTRIBUTED): 5,000 LBS INTERNAL POWER UNIT 24V WATER RESISTANT. CONTROL IS HANDHELD, 2 BUTTON, NEMA 4 PENDANT WITH MINIMUM 8' USABLE COIL CORD

56 FRAME, 2 HP MOTOR (@ 3 PHASE)
EMERGENCY BRASS SAFETY VELOCITY FUSE IN CYLINDERS

UPPER TRAVEL LIMIT SWITCH ELECTRIC PINCH POINT GUARD DURABLE LIQUID PAINT BLUE FINISH

SPECIAL FEATURES

NONE

DECK TOLERANCE± 1/2" TABLE HEIGHT TOLERANCE ± 1/2" DECK FLATNESS ± 1/4' PLEASE CIRCLE SPECIFICATIONS:

R DC (13/1) **POWER** 0 |MOTOR VOLTAGE|115 |208 | V 460 DEDICATED CIRCUIT REQUIRED 60Hz - SINGLE MOTOR PHASE **THREE** CONTROL **HAND** F001

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS

UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE [] As marked [] As drawn

Signed:	Date:	Date:		
Printed Name:				

	<u>'ON RECEIF</u>	PT OF SIGNED	<u>APPROVAL DRAWING</u>
DISTRIBUTOR'S NAME:			P.O.# X
VESTIL MANUFAC	W.O.# X		
DRAWN BY: KEC	DATE: 10/	4/16	SALES: X
reference: X		SCALE: 1:24	
QUOTED LEAD TIME: X	QUOTE #		26-007-101-002