
LIFT & TILT SCISSOR TABLE - EHLTTS-3654-4-48

APPROX WEIGHT: 1164.31 lbs.

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON 54"

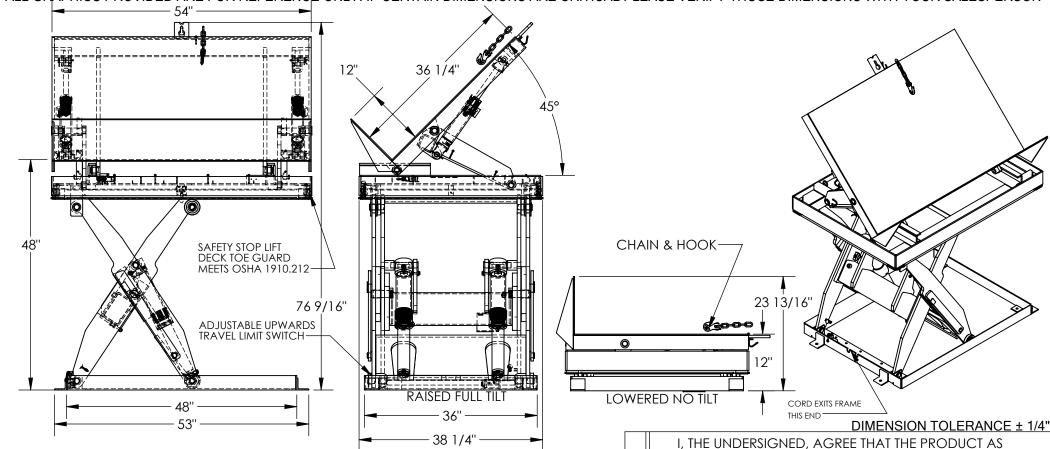

STANDARD FEATURES

MODEL NUMBER IS EHLTTS-3654-4-48 CAPACITY: 4,000 LBS W/ UNIFORM LOAD PLATFORM WIDTH IS 36 1/4" PLATFORM LENGTH IS 54" PLATFORM RAISED HEIGHT IS 48" PLATFORM LOWERED HEIGHT IS 12"

MAXIMUM TILT ANGLE IS 45° SIDE LINK TILT OVERALL SIZE (W x L) IS 38 1/4" x 54" MAXIMUM HEIGHT IS 76 9/16" SAFETY MAINTENANCE PROPS DISPLACEMENT LIFT CYLINDER W/ DOWN VELOCITY FUSE DOUBLE ACTING TILT CYLINDERS W/ DOWN VELOCITY FUSE UNITS HAVE 2 FT TEST LEAD AND PG TAIL Ø1/4" x 60" CHAIN AND HOOK (NOT DRAWN TO SCALE) CONTROL IS HANDHELD, 4 BUTTON, NEMA 4 PENDANT WITH MINIMUM 8' USABLE COIL CORD **DURABLE LIQUID PAINT BLUE FINISH** NONE INTERNAL POWER UNIT

PLEASE CIRCLE SPECIFICATIONS:

	POWER A		C	-DC	: (12∀	() Alf	V/OIL
	MOTOR VOLTAGE			115	200	230	460
	DEDICATED CIRCUIT REQUIRED 60Hz						
				INGLE		THREE	
				HAND		ГООТ	
EL OCITY FLICE							

SPECIAL FEATURES

REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO Ρ CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS. Ρ R UNITS REQUIRING APPROVAL DRAWINGS OR 0 MODIFIED ARE NON-RETURNABLE

[] As marked [] As drawn Signed: Date:

Printed Name: LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:

VESTIL MANUFACTURING DRAWN BY: BCN

W.O.# SALES: X

4/11/2017 reference: X SCALE: 1:20 FILE NAME: Quoted lead time: $_{
m Y}$

Χ

QUOTF # 02-007-221-001