
ELECTRIC PALLET TRUCK - EPT-2547-30

ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE

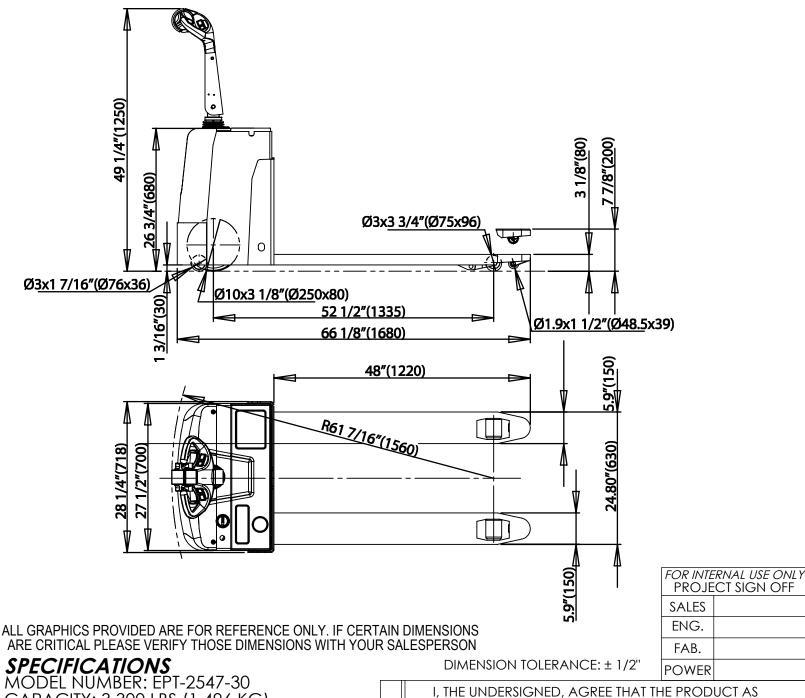

Ρ

Ρ

R

0

٧

Α

L

CAPACITY: 3,300 LBS (1,496 KG) DRIVE MOTOR: DC24V/0.7KW LIFT MOTOR: DC24V/1.3KW CONTROLLER: CP2207A-5102

HANDLE: CH-2

BATTERY: 2x12V/85-95Ah

BATTERY CHARGER: 24V/12amp

LIFTING SPEED WITHOUT LOAD: 1.57"/s

LIFTING SPEED WITH LOAD: 1.37"/s DOWN SPEED WITHOUT LOAD: 1.18"/s

DOWN SPEED WITH LOAD: 1.57"/s

TRAVEL SPEED WITHOUT LOAD: 3.4 m/h TRAVEL SPEED WITH LOAD: 2.8 m/h LOWERED FORK HEIGHT: 3 1/8" (80mm)

RAISED FORK HEIGHT: 7 7/8" (200mm) TOUGH BAKED IN POWDÉR COAT

BLACK & YELLOW FINISH

	I OVVLK	
I, THE UNDERSIGNED, AGREE THAT TH	HE PROD	UCT AS
REPRESENTED SATISFIES DESIGN AN	D DIMEN	1SION
REQUIREMENTS. I ALSO ACKNOWLED	GE MY I	DUTY TO

CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS

UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

[]/\tau_iawii		[]/\omega_marked		
Signed:		Date:		

Printed Name:

LEAD TIME WILL START UP	'UN RECEIF	TI OF SIGNED	APPROVAL DRAWIN
DISTRIBUTOR'S NAME:			P.O.# X
VESTIL MANUFAC	W.O.# X		
DRAWN BY: TM	DATE: 4/2	6/2019	SALES: X
reference: X		SCALE: 1:2	FILE NAME:
QUOTED LEAD TIME: Y	QUOTE #		EPT-2547-30