


# EPT-2748-26

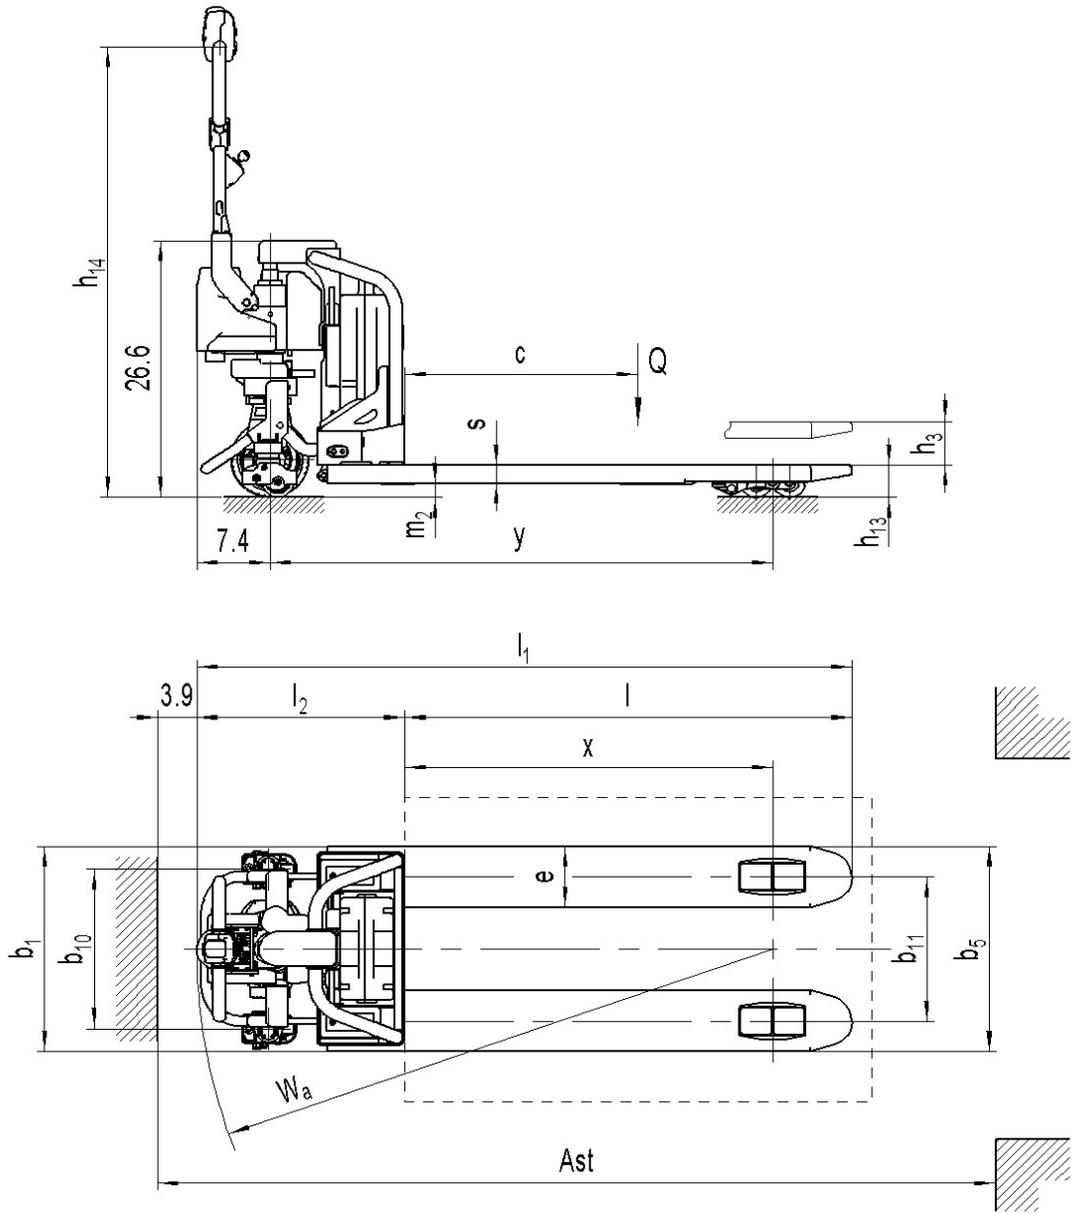

**Specifications**  
 Loading Capacity: 2,600 lbs (1,200 kgs)  
 Drive Motor: DC24V/0.44KW  
 Lift Motor: DC24V/0.8KW  
 Controller: MOSFET (equivalent to Curtis 1212P-2501)  
 Battery: 2x12V/45Ah (AGM)  
 Battery Charger: 24V/8amp  
 Lifting Speed without Load: 2.08"(53mm)/sec  
 Lifting Speed with Load: 1.18 (30mm)"/sec  
 Down Speed without Load: 1.06 m  
 Down Speed with Load: 2.60 m  
 Travel Speed without Load: 2.87 m/h  
 Travel Speed with Load: 2.62 m/h  
 Gradeability without load: 10°  
 Gradeability with load: 4°  
 Forks lowered height (h13): 3.3" (85mm)  
 Forks raised height: 7.8" (200mm)

h3 (lift height): 4.5"  
 h13 (lowered height): 3.3"  
 h14 (overall height): 46.7"  
 l1 (overall length): 69.1"  
 l2 (machine body length): 21.1"  
 m2 (undeground clearance): 1.5"  
 s/e/l (fork dimensions): 1.9/6.3/48  
 b5 (fork width): 27"  
 b1 (overall width): 27"  
 Wa (Turning Radius): 60.1"  
 Ast (Aisle width): 85"  
 Height of handle in drive position: 33"

|   |                  |
|---|------------------|
| VESTIL MANUFACTURING CORP.                        |                  |
| MODEL:  | EPT-2748-26      |
| DESCRIPTION: 2,600 LBS SEMI ELECTRIC PALLET TRUCK |                  |
| DESIGN: T.M.                                      | DATE: 03/06/2018 |