
## **GANTRY POWER TRACTION DRIVE - GPTD-2**

APPROX WEIGHT: 257 lbs.

DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\* ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON.

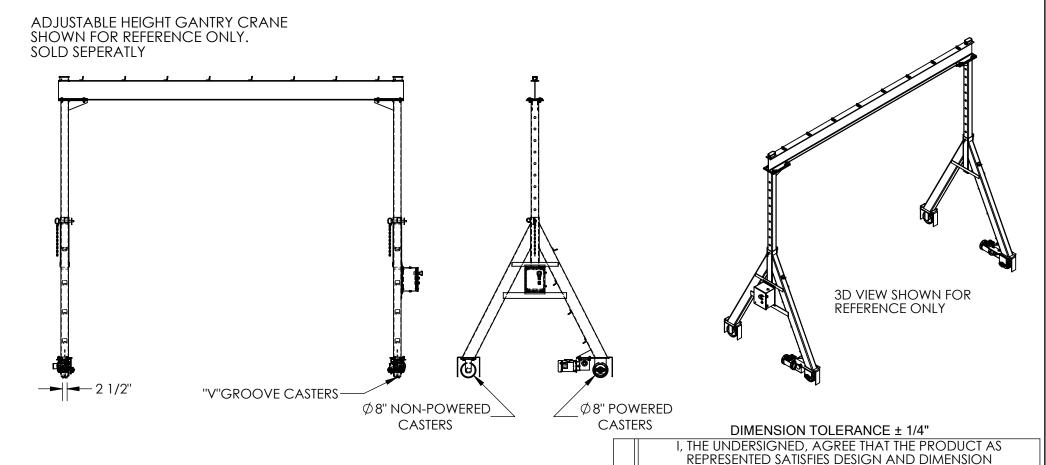

## STANDARD FEATURES

MODEL NUMBER IS GPTD-2 MAX CAPACITY IS 4000 LB WHEEL DIAMETER IS 8" WHEEL WIDTH IS 2 1/2"

- (4) CAST IRON "V" GROOVE CASTERS
- (2) CASTERS POWERED BY ELECTRIC

MOTOR WITH REDUCER

CONTROL BOX INCLUDES (3) PUSH BUTTONS: FORWARD, REVERSE, & E-STOP (NOT SHOWN) DESIGNED FOR 2000 LB AND 4000 LB CRANES

## SPECIAL FEATURES

NONE

## PLEASE CIRCLE SPECIFICATIONS: A

<u> </u>								
POWER	AC	C DC (1			2V)	AIR/OIL		
MOTOR V	OLTAGE	11	5	208	3	230	460	
DEDICATED CIRCUIT REQUIRED 60Hz								
MOTOR PHASE SI		SINC	NGLE		THREE			
CONTR	ROL	НА	AND		FOOT		TC	

REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS. ANY MODIFIED UNITS ARE NON-RETURNABLE

[ ] As drawn [ ] As marked

Date: Signed:

Printed Name:

PPROVAL DRAWING

		LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWII							
OR INTE	P.O.# X								
PROJECT SIGN OFF VESTIL MANUFACTURING					W.O.#				
SALES					CALEC:				
ENG.		M12	DATE: 3/2		SALES: X				
FAB.		reference: X		SCALE: 1:50					
OWFR		QUOTED LEAD TIME: $\chi$	QUOTE #	,	28-007-392-001				