
STATIONARY HYDRAULIC DRUM DUMPER- HDD-36-15-5 APPROX WEIGHT: 636.66 lbs. Does not include weight of power or packaging!! ***ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE*** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON CHUTE POWDER COATED YELLOW 45° **ADJUSTABLE DUMP HEIGHT ROTATED CLAMPS ANGLE HEIGHT**

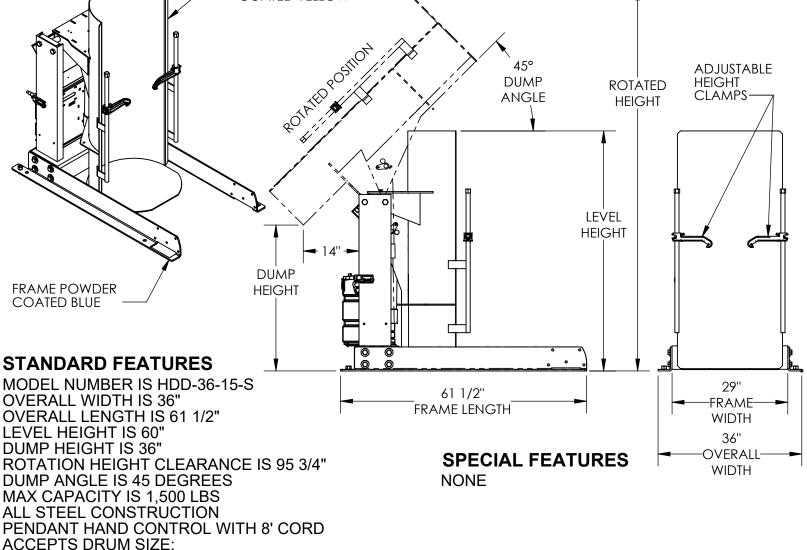

Ø16 1/2" TO Ø23 1/2" (ROUND) X 27 1/2" TO 39 1/2" H (TALL)

BASE POWDER COATED BLUE

CHUTE POWDER COATED YELLOW

TOUGH BAKED IN POWDER COATED FINISH

3,000 P.S.I. HYDRAULIC COMPONENTS RATING WARNING: CHECK STATE AND LOCAL CODES !!!

UNIT MUST BE SECURED TO FLOOR BEFORE USE

PLEASE CIRCLE SPECIFICATIONS:

FLEASE CINCLE SPECIFICATIONS.									
	POWER	AC		-*-E	C		* AIR/OIL		
	MOTOR V	OLTA	GE	115	20	8	230	460	
	DEDICATED CIRCUIT REQUIRED								
	MOTOR P	SINGLE			THREE				
	CONTR	HAND			* FOOT				
	~ ALL BATTERY CHARGERS ARE 115V AC ~								
*	BATTERY CHRG.		RE	REMOTE			ON-BOARD		
*	CHRG. INDIC	YES			NO				
* AVAILABLE AT ADDITIONAL COST									

DIMENSION TOLERANCE ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO Р CONFIRM PRODUCT AND INSTALLATION P COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE R AND LOCAL REGULATIONS AND STANDARDS.

UNITS REQUIRING APPROVAL DRAWINGS OR 0 MODIFIED ARE NON-RETURNABLE V Α [] As drawn [] As marked Signed: Printed Name: LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING DISTRIBUTOR'S NAME: VESTIL MANUFACTURING W.O.# Χ SALES: X **CRM** 10/21/2010 REFERENCE: X FILE NAME: SCALE: 1:24 QUOTED LEAD TIME: X QUOTE # 09-007-122-002