
HYDRAULIC POST TABLE - HT-40-2436-DC

PROX WEIGHT: 469.56 lbs. IS NOT INCLUDE WEIGHT OF POWER OR PAI

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

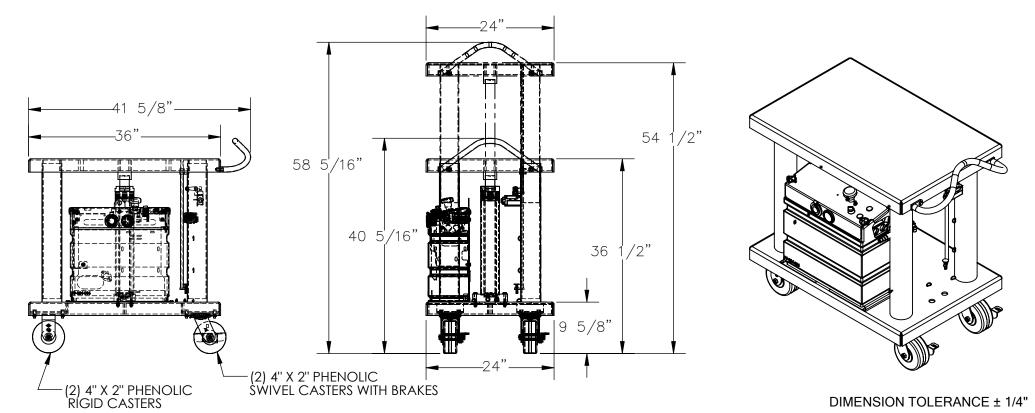

STANDARD FEATURES

MODEL NUMBER IS HT-40-2436-DC MAX CAPACITY IS 4,000 LBS.

OVERALL WIDTH: 24" USABLE WIDTH: 24"

OVERALL LENGTH: 41 5/8"

USABLE LENGTH: 36"

RAISED HEIGHT: 54 1/2"

LOWERED HEIGHT: 36 1/2" OVERALL RAISED HEIGHT: 58 5/16"

OVERALL LOWERED HEIGHT: 40 5/16"

(2) PHENOLIC RIGID CASTERS

(2) PHENOLIC SWIVEL CASTERS WITH BRAKES

HÝDRAULIC HOSES NOT SHOWN

TOUGH BAKED IN POWDER COATED BLUE FINISH

PLEASE CIRCLE SPECIFICATIONS:

r	LEASE	LIKL	LE .	SPE		<u> </u>	AII	UNS.	
	POWER	AC		DC (12V)			* AIR/OIL		
	MOTOR V	OLTA	GE -	115	208	3	230	460	
	DEDICATED CIRCUIT REQUIRED								
	MOTOR PHASE			SINGLE			THREE		
	CONTROL		F	HAND		* FOOT			
	~ ALL BATTERY CHARGERS ARE 115V AC ~								
	BATTERY CH	HRG.	RE/	TON	E O		n-board		
*	CHRG. INDICATOR			YES		NO			

* A VAILABLE AT ADDITIONAL COST

SPECIAL FEATURES

NONE

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE

[] As drawn [] As marked

Signed:_____Date:___

Printed Name:

| || LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING |
DISTRIBUTOR'S NAME: |P.O.# , ,

W.O.#

ı		
ı	\/CCTII	MANUFACTURING
ı	AEDIIL	MANUFACTURING

CAWN BY: CRH DATE: 3/11/2020 SALES: X

EFFRENCE: X SCALE: 1:18 FILE NAME:

QUOTED LEAD TIME: X QUOTE # X 21-007-148