
## **ROLLER WORK POSITIONER - HYD-RR-35**

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\*
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

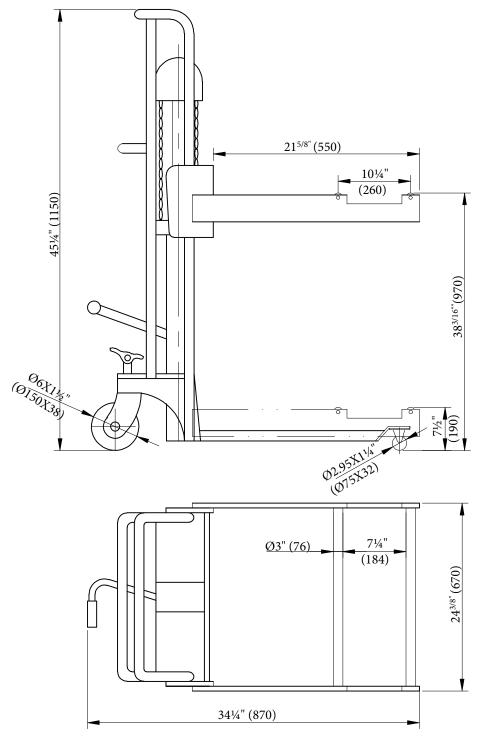

## STANDARD FEATURES

Specifications
Capacity: 800 lbs
Maximum Roll Diameter: 21"
Service Range: 8 to 38"
Overall Size (LxWxH): 38x24x46"
Casters:
Rear (2) Ø6x1½
Front (2) Ø3x1¼
Foot pump operation

## SPECIAL FEATURES

**NO SPECIAL FEATURES** 

## DIMENSION TOLERANCE + 1/2"

DIMENSION FOLLY WILL IN				
A P P R O V	I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.  ALL SPECIAL UNITS ARE NON-RETURNAB  [ ] As drawn [ ] As marked			DIMENSION E MY DUTY TO LATION DERAL, STATE ANDARDS. RETURNABLE
A	Signed:Date:			Date:
LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING				
DISTRIBUTOR'S NAME:			P.O.# X	
VESTIL MANUFACTURING				W.O.# X
DRAWN BY: TM		DATE: 04/12/18		SALES: X
REFERENCE: X				FILE NAME:
QUOTED LEAD TIME: Y QUOTE #				HYD-RR-35