

APPROX WEIGHT: 8.20 lbs.

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

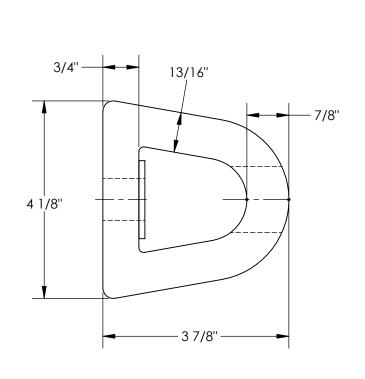

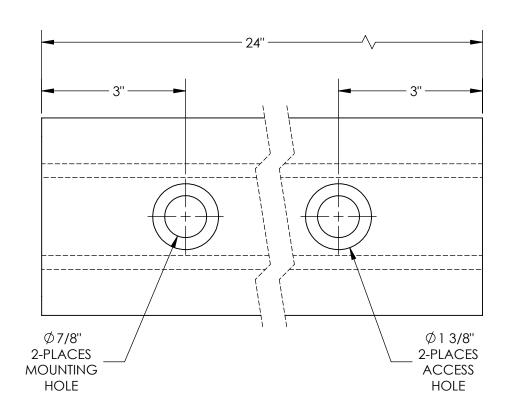

JWW

reference: X

QUOTED LEAD TIME: χ

STANDARD FEATURES

MODEL NUMBER IS M-4-24 OVERALL WIDTH IS 4 1/8" OVERALL LENGTH IS 24" OVERALL HEIGHT IS 3 7/8" NUMBER OF MOUNTING HOLES 2 MOUNTING HOLE SIZE \emptyset 7/8" ACCESS HOLE SIZE \emptyset 1 3/8" (2)-REINFORCEMENT PLATES INCLUDED SIZE: 1 5/8" x 6" DUROMETER READING: A70 ± 5

TENSIL: 1850 PSI ELONGATION: 220%

TEAR STRENGTH: 229 LBS IMPACT RESISTANCE: 75% BUMPER COLOR: BLACK

SPECIAL FEATURES

FOR INTERNAL USE ONLY

PROJECT SIGN OFF

SALES

ENG.

FAB.

POWER

NONE

		DIMENS	ION TOLERANCE ± 3/4"
A P P R O V	I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS. ANY MODIFIED UNITS ARE NON-RETURNABLE [] As drawn [] As marked		
Α	Signed:		Date:
L	Printed Na	me:	GNED APPROVAL DRAWING
DISTRIBUTOR'S NAME: P.O.#			
VESTIL MANUFACTURING			X W.O.# X

04/25/19

QUOTE #

Χ

SCALE: 1:2

SALES: X

FILE NAME:

29-007-076