
EDGE-O-DOCKLEVELER - PE-2072

APPROX WEIGHT: 531.56 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

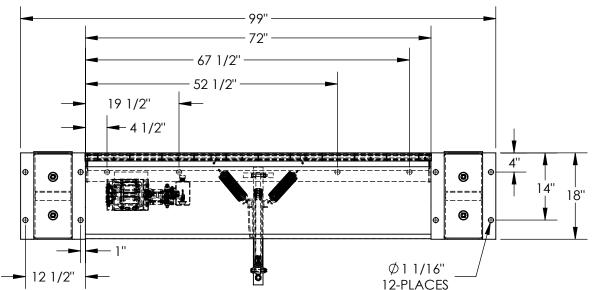

STANDARD FEATURES

SPECIAL FEATURES

NONE

MODEL NUMBER IS PE-2072 **OVERALL WIDTH IS 99"** DECK WIDTH IS 72" OVERALL DEPTH WITH RAMP OUT IS 29" **BUMPER PROJECTION IS 17 1/2"** UNIFORM CAPACITY IS 20.000 lbs. 5" ABOVE / 5" BELOW SERVICE RANGE RECOMMENDED FOR DOCKS AT LEAST 48" HIGH. UNIT COMES WITH MOTOR, PUMP, CONTROL BOX, CYLINDER, HYDRAULIC LINES AND OIL. TREADPLATE RAMP & DECK CONSTRUCTION DURABLE LIQUID PAINT BROWN FINISH

| ─── ► | | |
|---|--|--|
| <i> <i> </i></i> | 3/8" 27 1/2" - 17 1/2" - 29" | |
| | | OLERANCE ± 1/4" |
| 29" 5T 48" HIGH. NTROL BOX, IL. JCTION H | A REPRESENTED SATISFIES DESIGN AND DIMINE REQUIREMENTS. I ALSO ACKNOWLEDGE MICHARD CONFIRM PRODUCT AND INSTALLA P COMPLIANCE WITH ALL APPLICABLE FEDE AND LOCAL REGULATIONS AND STANK UNITS REQUIRING APPROVAL DRA MODIFIED ARE NON-RETURM [] As drawn [] As maine | MENSION MY DUTY TO TION ERAL, STATE DARDS. AWINGS OR NABLE |
| PLEASE CIRCLE SPECIFICATIONS: | | |
| | | APPROVAL DRAWING |
| MOTOR VOLTAGE 115 208 230 460 | | ν.ο.# χ X |
| | drawn by: M.WILSON Date: 12/19/2012 | ALES: X |
| MOTOR PHASE SINGLE THREE CONTROL HAND * FOOT | | ILE NAME: |
| | | 06-007-007 |