
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON.

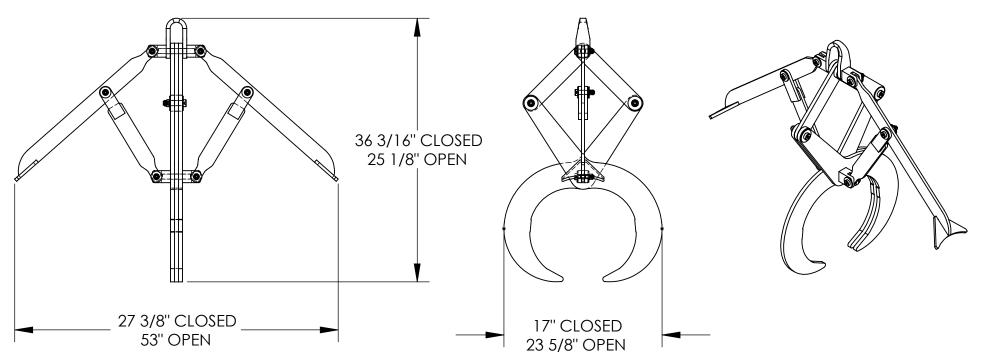

DIMENSION TOLERANCE ± 1/4"

STANDARD FEATURES

MODEL NUMBER IS PG-C-200 CAPACITY: 2.000 LBS. UNIT IS FOR 10.75" - 11.10" O.D. CAST IRON PIPE/TUBE TOUGH BAKED IN POWDER COATED YELLOW FINISH

NOTE: OVERALL DIMENSIONS GIVEN IS THE MAX/MIN FOR E

SPECIAL FEATURES **NONE**

EACH VALUE		A	Signed:		Date:	
		L		PON RECEIPT OI	F SIGNED APPROVAL DRAV	_ VING
FOR INTERNAL USE ONLY PROJECT SIGN OFF		DISTR	BUTOR'S NAME:	THRING	P.O.# X W.O.#	
SALES		VESTIE /V// (1101/ (CTOKII10			^	
ENG.		DRAV	^{VN BY:} SR	DATE: 9/25/		
FAB.			RENCE: X	SC/	ALE: 1:12 FILE NAME:	
POWER		QUO1	TED LEAD TIME: X	QUOTE #	28-007-164-00	01

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO Ρ COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE Ρ R 0

AND LOCAL REGULATIONS AND STANDARDS.

CONFIRM PRODUCT AND INSTALLATION

ANY MODIFIED UNITS ARE NON-RETURNABLE [] As drawn [] As marked