
APPROX WEIGHT: 19.51 lbs.

DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

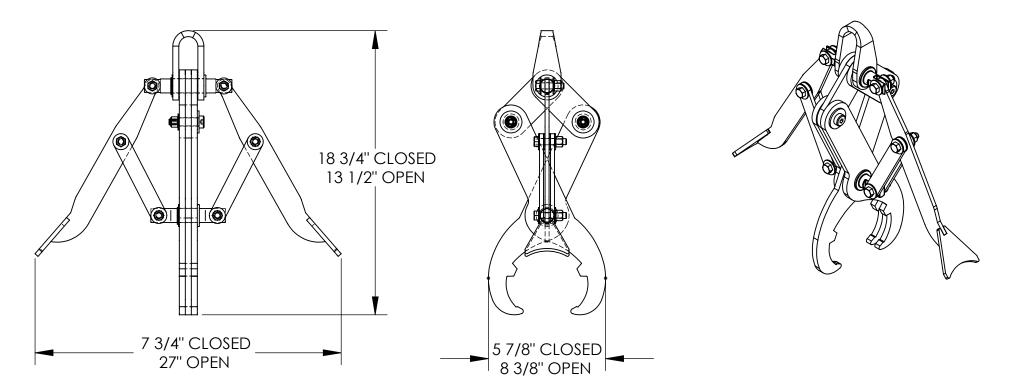

FAB.

POWER

NOTE: OVERALL DIMENSIONS GIVEN IS THE MAX/MIN FOR EACH VALUE

DIMENSION TOLERANCE ± 1/4"

FILE NAME:

28-007-161-002

SCALE: 1:6

QUOTE #

Χ

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION

STANDARD FEATURES

MODEL NUMBER IS PG-S-045 CAPACITY: 450 LBS. UNIT IS FOR 3.5" - 4.0" O.D. STEEL PIPE/TUBE TOUGH BAKED IN POWDER COATED YELLOW FINISH

SPECIAL FEATURES

NONE

	A P P R O V	COMPL AND	D INSTALL CABLE FEI AND STA				
	A	Signed:				_Date:	
	L	Printed Name: LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING					
FOR INTERNAL USE ONLY PROJECT SIGN OFF		IBUTOR'S NAME:	NITEAC	THRING		P.O.# X W.O.#	
SALES	V ESTIL TVIT (1 VOT T C T OT (11 V O						
ENG.	DKA	^{WN BY:} SR	l	DATE: 9/25/	2006	SALES: X	

REFERENCE:

QUOTED LEAD TIME: X