


APPROX WEIGHT: lbs.  
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\*

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

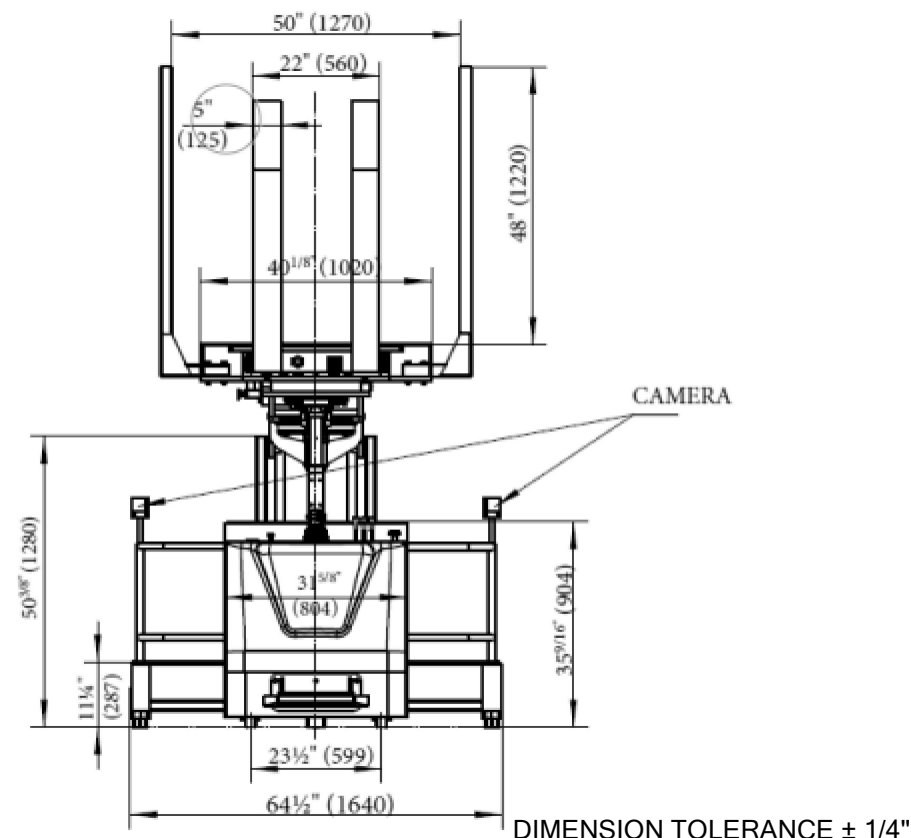

Model # PI-P-SL-3276-PRSR	Turning radius: 84½"
Capacity: 3,000 lbs.	Overall size: 91½ x 64½x 8213/16"
Lowered height: 33/8"	Camera with side rails
Forks size: 22 x 421/8" Fork opening: 32~76"	Powered Rotation
Travel Speed unloaded: 3.7m/h	Side Plate to protect the packages
Travel speed loaded: 2.5m/h	Hand Control with Coil Cord
Drive motor: 24V/1.2 KW	
Lift motor: 24V/2.0KW	
Battery: 4 - 6 volt/200Ah	
Battery charger: 24V	
Controller: 2207A-5102	

**APPROVAL**

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

**UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE**

☐ As drawn      ☐ As marked

Signed: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name: \_\_\_\_\_

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME: <b>VESTIL MANUFACTURING</b>		P.O.# X
		W.O.# X
DRAWN BY: TAL	DATE: 12/04/2025	SALES: X
REFERENCE: X	SCALE: 1:4	FILE NAME: PI-P-SL-3276-PRSR
QUOTED LEAD TIME: X	QUOTE # X	