
ECONOMY SPREADER BEAM W/ MAGNETIC LIFTERS - SBM-20-4-ML APPROX WEIGHT: 184.57 lbs.

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

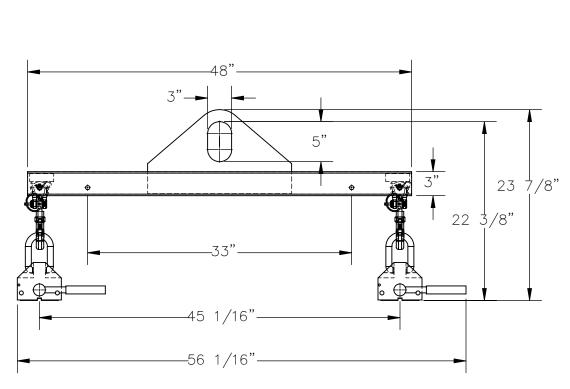

STANDARD FEATURES

MODEL NUMBER IS SBM-20-4-ML OVERALL WIDTH IS 10 3/4"

OVERALL HEIGHT IS 23 7/8"

OVERALL LENGTH IS 56 1/16"

USALBLE BAIL IS 3"x5"

MINIMUM SPREAD IS 33"

MAXIMUM SPREAD IS 45 1/16"

HEADROOM IS 22 3/8"


MAX UNIFORM FLAT CAPACITY IS 2000 LBS.

MAX UNIFORM ROUND CAPACITY IS 800 LBS.

SPREADER BEAM DURABLE BAKED IN POWDER COAT BLUE FINISH MAGNET LIFTERS DURABLE BAKED IN POWDER COAT YELLOW FINISH

SPECIAL FEATURES

NONE

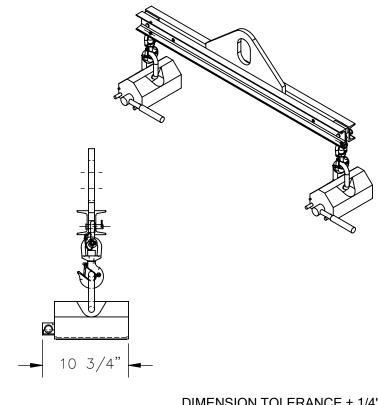

			D	IMENSION	TOLERAN	CE ± 1/4"
APPROV	REPR REQUIR COMP ANI UNITS	JINDERSIGNED ESENTED SATI EMENTS. I AL CONFIRM PRO LIANCE WITH D LOCAL REC REQUIRIN MODIFIED	ISFIES DESI SO ACKN ODUCT AN ALL APPL GULATION IG APPR	IGN AND D IOWLEDGE ND INSTALL ICABLE FEE S AND STA OVAL DE	DIMENSION MY DUTY ATION DERAL, STA NDARDS. RAWINGS RNABLE	TE
A		[] As d	Irawn	[] As m	narked	
V A L	Signed:_	[] As d	Irawn	[] As m	narked Date:	
A L	Printed N	lame:			_Date:	
L	Printed N	lame:			Date:	
L	Printed N	lame:			_Date:	DRAWING
DISTRIE	Printed N LEAD TIME BUTOR'S NAME	lame:	PON RECEIP	T OF SIGNEL	Date:	DRAWING
L	Printed N LEAD TIME BUTOR'S NAME ESTIL M. //N BY: JGP	lame:	CTURIN	T OF SIGNEL	Date: DAPPROVAL P.O.# X W.O.# X SALES: X	DRAWING

QUOTE #

Χ

08-007-452

QUOTED LEAD TIME: X