DC POWERED HYDRAULIC SCISSOR LIFT TABLE - SCTAB-500-2033-AC


DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

DECK TOLERANCE ±1/2"

DECK FLATNESS ±1/4"

TABLE HEIGHT TOLERANCES ±1/2"

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

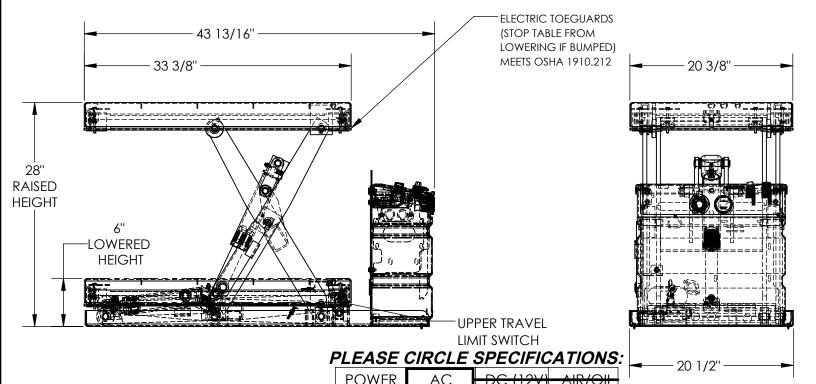

MOTOR VOLTAGE 115 208 DEDICATED CIRCUIT REQUIRED 60Hz Α MOTOR PHASE **THREE** CONTROL HAND Ρ

DECK LENGTH IS 33 3/8" **RAISED HEIGHT IS 28"** LOWERED HEIGHT IS 6" TABLE CAPACITY (EVENLY DISTRIBUTED) NONE

MAX CAPACITY IS 500 LBS. CONTROL IS HANDHELD 2 BUTTON. NEMA 4 PENDANT WITH MINIMUM 8' USABLE COIL CORD

SAFETY MAINTENANCE PROPS DISPLACEMENT

STYLE CYLINDERS INSTALLED ROD DOWN **EMERGENCY SAFETY STOP HYDRAULIC FUSES**

UPPER TRAVEL LIMIT SWITCH **ELECTRIC PINCH POINT GUARD**

STANDARD FEATURES

DECK WIDTH IS 20 3/8"

MODEL NUMBER IS SCTAB-500-2033-AC

DURABLE LIQUID PAINT BLUE FINISH

SPECIAL FEATURES

FOR INTERNAL USE ONLY PROJECT SIGN OFF **SALES** ENG. FAB. **POWFR**

Ρ

0

V

Α

DIMENSION TOLERANCE ± 1/4" I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ANY MODIFIED UNITS ARE NON-RETURNABLE

[] As marked

Signed:

[] As drawn

Printed Name: LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:			P.O.# X
			W.O.# X
DRAWN BY: CRA	DATE: 10/	17/201/	SALES: X
reference: X	,	SCALE: 1:12	FILE NAME:
QUOTED LEAD TIME: χ	QUOTE #	1	01-007-394

Χ