
APPROX WEIGHT: 20.88 lbs.

DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

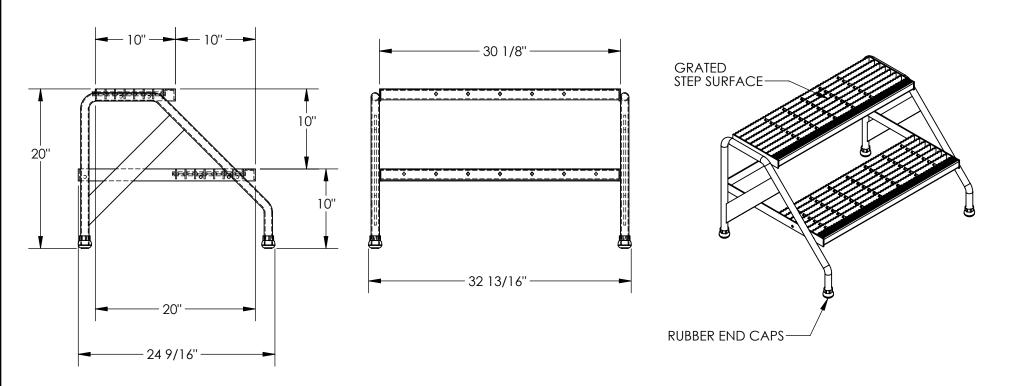

STANDARD FEATURES

MODEL NUMBER IS SSA-2W DOUBLE STEP UNIT OVERALL WIDTH IS 32 13/16" USEABLE WIDTH IS 30 1/8" OVERALL LENGTH IS 24 9/16" USEABLE LENGTH IS 20" OVERALL HEIGHT IS 20" MAX CAPACITY IS 500 LBS RAW ALUMINUM FINISH

SPECIAL FEATURES

NONE

DIMENSION TOLERANCE + 1/4"

| DIMENSION TOLERANCE ± 1/4" | | | | |
|----------------------------|--|--|--------------|------------------|
| APPROVA | I, THE UNDERSIGNEI REPRESENTED SAT REQUIREMENTS. I AI CONFIRM PRI COMPLIANCE WITH AND LOCAL REC UNITS REQUIRIN MODIFIED [] As c | MENSION MY DUTY TO ATION ERAL, STATE IDARDS. AWINGS OR NABLE | | |
| | Signed: | | | _Date: |
| | Printed Name: | PON RECEI | PT OF SIGNED | APPROVAL DRAWING |
| DISTRIBUTOR'S NAME: | | | P.O.# X | |
| VESTIL MANUFACTURING | | | IG | W.O.# X |
| DRAWN BY: BCN | | DATE: 2/8 | /2016 | SALES: X |
| REFERENCE: X | | | SCALE: 1:12 | FILE NAME: |
| QUOTI | ED LEAD TIME: X | QUOTE # | | 44-007-462 |