

DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

MODULAR STYLE STAIRWAY, STAIR-60 ***ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVVE***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTIAN DIMINSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

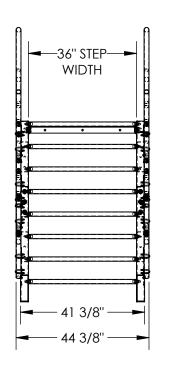

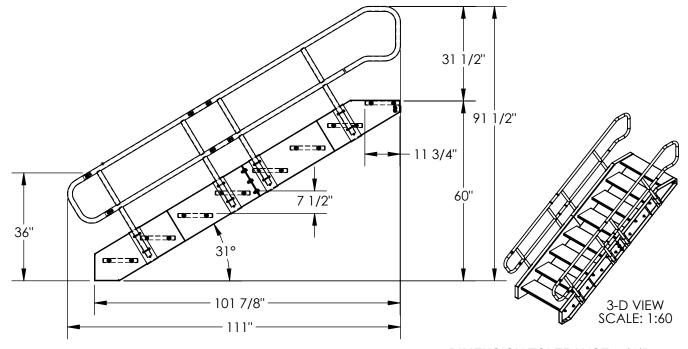

QUOTED LEAD TIME:

DIMENSION TOLERANCE ± 1/4"

44-007-719

STANDARD FEATURES

MODEL NUMBER: STAIR-60 MAX CAPACITY: 1,000 LBS.

STANDARD MODULAR DESIGN WITH BOLT-ON HANDRAIL UNIT SHIPS KNOCKED-DOWN (ASSEMBLY REQUIRED) TOP STEP IS FLUSH WITH THE LANDING

CLIMB ANGLE: 31° (APPROX.) STEP HEIGHT SPACING: 31°

TOP STEP HEIGHT: 60" RUN DIMENSION: 101 7/8"

OVERALL DIMENSIONS: 44 3/8" W x 111" L x 91 1/2" H STAIR IS TOUGH BAKED IN POWDER COATED BLUE FINISH HANDRAIL IS TOUGH BAKED IN POWDER COATED YELLOW FINISH

SPECIAL FEATURES

NONE

APPROVA	REPRESENTED SAT REQUIREMENTS. I AL CONFIRM PRO COMPLIANCE WITH AND LOCAL REC UNITS REQUIRIN MODIFIED	D, AGREE THAT THE PRODUCT AS ISFIES DESIGN AND DIMENSION SO ACKNOWLEDGE MY DUTY TO ODUCT AND INSTALLATION ALL APPLICABLE FEDERAL, STATE GULATIONS AND STANDARDS. G APPROVAL DRAWINGS OR ARE NON-RETURNABLE Irawn [] As marked
L	Signed:	Date:
L	Printed Name:	
L	Printed Name: LEAD TIME WILL START UP	Date:
	Printed Name: LEAD TIME WILL START UP BUTOR'S NAME:	PON RECEIPT OF SIGNED APPROVAL DRAWING
VI	Printed Name: LEAD TIME WILL START UP BUTOR'S NAME: ESTIL MANUFACTUR	PON RECEIPT OF SIGNED APPROVAL DRAWING P.O.# X W.O.# X
VI	Printed Name: LEAD TIME WILL START UP BUTOR'S NAME:	P.O.# X ING

QUOTE#