
APPROX WEIGHT: 252.92 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

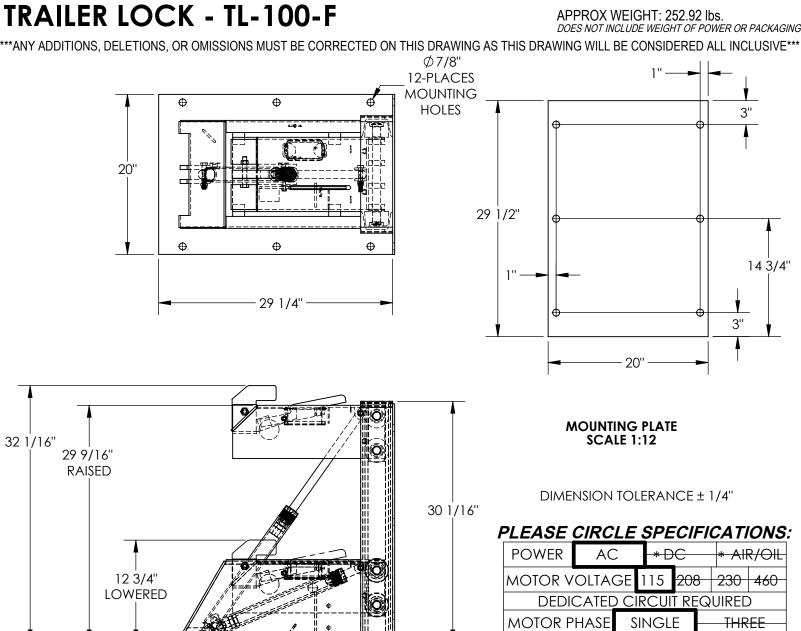

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

* AVAILABLE AT ADDITIONAL COST

HAND

~ ALL BATTERY CHARGERS ARE 115V AC ~

REMOTE

YES

FOOT

ON-BOARD

NO

STANDARD FEATURES

MODEL NUMBER IS TL-100-F

OVERALL WIDTH: 20"

OVERALL LENGTH: 29 1/4" OVERALL HEIGHT: 32 1/16" STANDARD 115V, 1 PHASE REMOTE POWER UNIT IS 16"W x 24"L x 12"H

WITH 8' HYDRAULIC HOSE

CAN WALL MOUNT

& GROUND MOUNT THE UNIT TOUGH BAKED IN POWDER COATED YELLOW/BLUE FINISH.

DRAW PULL SHEAR STRENGTH

= 22,500 LBS PER FOOT

SPECIAL FEATURES NONE

| APPROVA | I, THE UNDERSIGNED, AGREE REPRESENTED SATISFIES DESI REQUIREMENTS. I ALSO ACKN CONFIRM PRODUCT AN COMPLIANCE WITH ALL APPL AND LOCAL REGULATION UNITS REQUIRING APPR MODIFIED ARE NO [] As drawn | IGN AND DIMENSION IOWLEDGE MY DUTY TO ND INSTALLATION ICABLE FEDERAL, STATE S AND STANDARDS. IOVAL DRAWINGS OR N-RETURNABLE | | |
|---------|---|---|--|--|
| L | Signed: | Date: | | |
| | Drinted Name: | | | |

CONTROL

BATTERY CHRG.

CHRG. INDICATOR

| Printed Name: | | | |
|-------------------------|-----------|--------------|-----------------|
| LEAD TIME WILL START UP | ON RECEI | PT OF SIGNED | APPROVAL DRAWIN |
| DISTRIBUTOR'S NAME: | | | P.O.# X |
| VESTIL MANUFAC | w.o.# X | | |
| B.HORN | DATE: 02/ | 03/13 | SALES: X |
| EFERENCE: X | , | SCALE: 1:12 | FILE NAME: |
| QUOTED LEAD TIME: X | QUOTE # | | 17-007-009 |