
SINGLE SCISSOR LIFT & TILT TABLE - UNI-4848-4

APPROX WEIGHT: 672.76 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***
ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

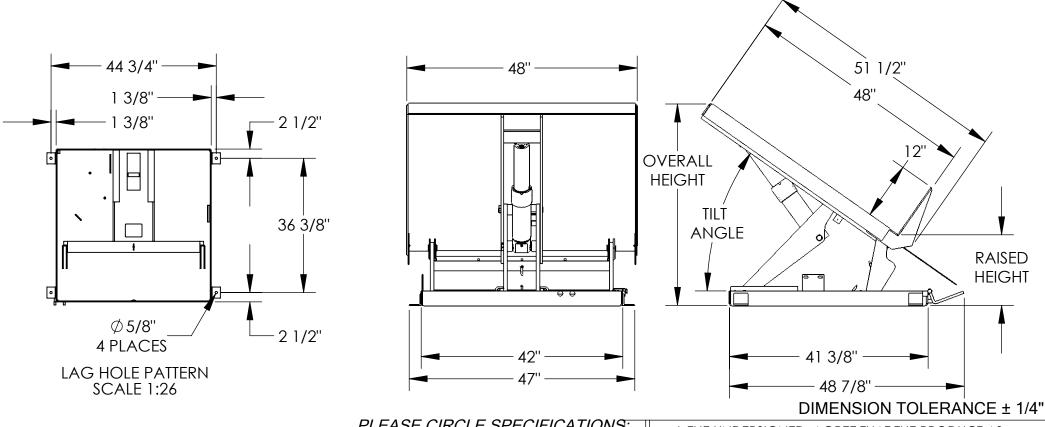

STANDARD FEATURES

MODEL NUMBER IS: UNI-4848-4

CAPACITY: 4,000 LBS. EVENLY DISTIBUTED SEQUENCE 1: RAISED HEIGHT: 14 3/4", TILT ANGLE 35° OVERALL HEIGHT: 42"

SEQUENCE 2: RAISED HEIGHT 11 3/4", TILT ANGLE: 40°
OVERALL HEIGHT 42 1/4"

LEVEL HEIGHT: 8"

DECK SIZE: 48" W X 48" L WITH 12" LIP

INTEGRAL MAINTENCE LOCK

ADJUSTABLE UPPER TRAVEL LIMIT SWITCH UNIT MUST BE LAGGED TO THE FLOOR

DURABLE LIQUID PAINT BLUE FINISH

SPECIAL FEATURES

PLEASE CIRCLE SPECIFICATIONS:										
	POWER	AC		DC	DC (12V)		/) AIR/OIL		Α	
	MOTOR V	OLTA	GE	115	20	8	230	460	Р	
0	DEDICATED CIRCUIT REQUIRED							R		
0	MOTOR P	OR PHASE SI		NGH	1GLE		THREE		O	
	CONTR	OL	H	IAND)		FOC	TC	V	
*	BATTERY C	HRG.	RE	MOT	<u>E</u>	9	N- BC	ARD	L	
*	CHRG. INDK	CATOR		YES		_	N C			
* AVAILABLE AT ADDITIONAL COST										
									$\overline{}$	_

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

UNITS REQUIRING APPROVAL DRAWINGS OR
MODIFIED ARE NON-RETURNABLE

[] As drawn [] As marked

Signed:	Date:

Printed Name:_______
LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

LLAD TIIVIL WILL START OF	ON NECETI TO	I GIGINED ALL NOVAL DIVANNIN
DISTRIBUTOR'S NAME:	P.O.# X	
VESTIL MANUFAC	^	
DRAWN BY: A.FORD	DATE: 8/10/0)7 SALES: X
REFERENCE: X	SCA	ALE: 1:20 FILE NAME:
QUOTED LEAD TIME: X	QUOTE #	03-007-017