


HIGH BACK/DUAL SIDE DOOR WORK PLATFORM - WP-4848-84B-DD

APPROX WEIGHT: 309.62 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

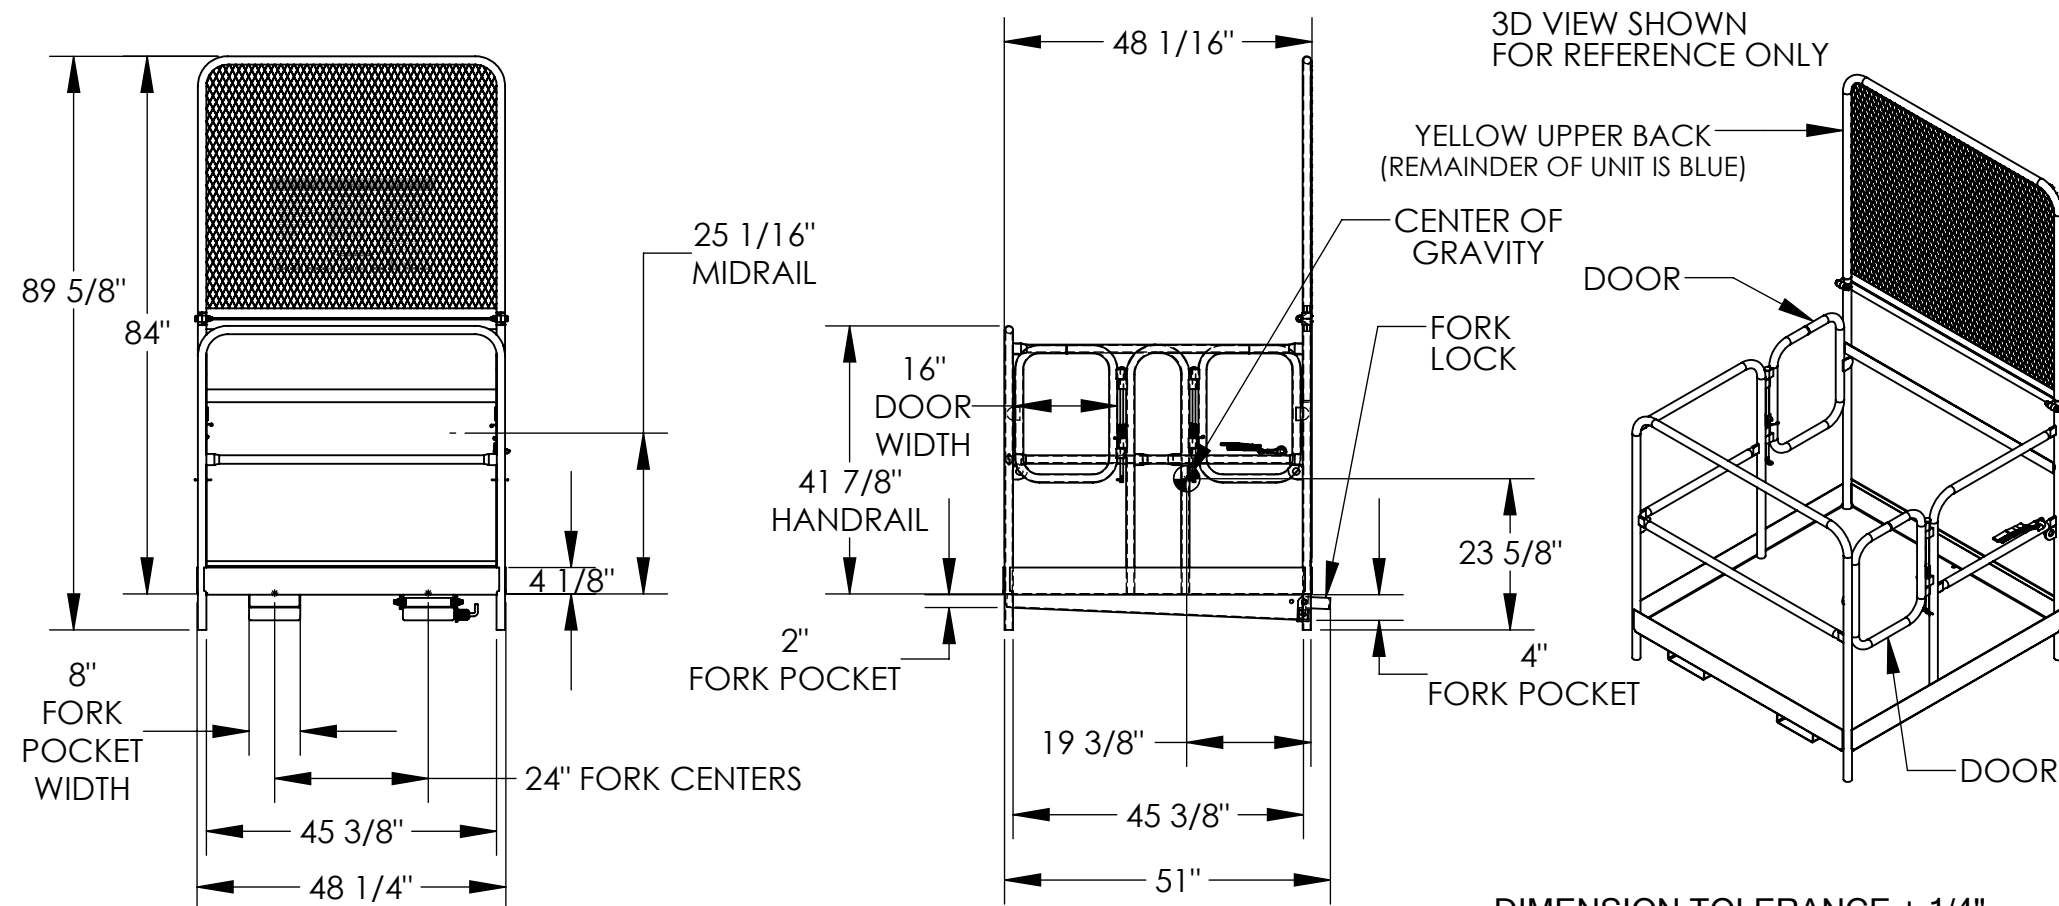

STANDARD FEATURES

MODEL NUMBER IS WP-4848-84B-DD
CAPACITY IS 1,000 LBS. (EVENLY DISTRIBUTED LOAD)
OVERALL WIDTH IS 48 1/4"
USABLE WIDTH IS 45 3/8"
OVERALL LENGTH IS 51"
USABLE LENGTH IS 45 3/8"
42" HIGH HANDRAIL WITH 25 1/16" MIDRAIL AND 4 1/8" TOEBOARD
(2) SELF-CLOSING DOORS SWING IN ONLY (WILL NOT OPEN OUT)
FORK LOCK IS ROTATED UP BEHIND BACK OF FORK
AND LOCKED WITH SPRING LOADED PLUNGER
36" LONG STRAP WITH HOOK (NOT SHOWN) MUST ATTACH
PLATFORM TO FORK TRUCK
84" HIGH EXPANDED MESH BACKING
USABLE FORK POCKET HEIGHTS: 3 7/8" REAR, 1 7/8" FRONT
USABLE FORK POCKET WIDTH: 7 3/4"
MANUFACTURED TO MEET OUR INTERPRETATION OF OSHA STANDARDS
TOUGH BAKED IN POWDER COATED ERGO BLUE FINISH FRAME AND
YELLOW UPPER BACK

APPROX. WEIGHT / LOST LOAD = 281.73
MINIMUM EFFECTIVE THICKNESS = >1"
NEVER EXCEED LOAD CENTER
RATING PER FORKTRUCK
MANUFACTURERS GUIDELINES.
DO NOT USE THIS FORK TRUCK
ATTACHMENT IF LOAD WILL
EXCEED FORK TRUCK MANUFACTURER'S
LOAD CENTER RATING

SPECIAL FEATURES

NONE

DIMENSION TOLERANCE $\pm 1/4"$

APPROVAL

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED
SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO
ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND
INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL,
STATE AND LOCAL REGULATIONS AND STANDARDS.

**UNITS REQUIRING APPROVAL DRAWINGS OR
MODIFIED ARE NON-RETURNABLE**

☐ As drawn ☐ As marked

Signed: _____ Date: _____

Printed Name: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME:		P.O.#
VESTIL MANUFACTURING		X
DRAWN BY:	C.WOLF	W.O.#
DATE:	08/31/06	X
REFERENCE:	X	SALES:
QUOTED LEAD TIME:	X	X
QUOTE #	X	FILE NAME:
		14-007-084