



Vestil Manufacturing Corp.

2999 North Wayne Street, P.O. Box 507, Angola, IN 46703


Telephone: (260) 665-7586 -or- Toll Free (800) 348-0868

Fax: (260) 665-1339

www.vestilmfg.com e-mail: info@vestil.com

BR-M3 Series Bicycle Racks

Instruction Manual

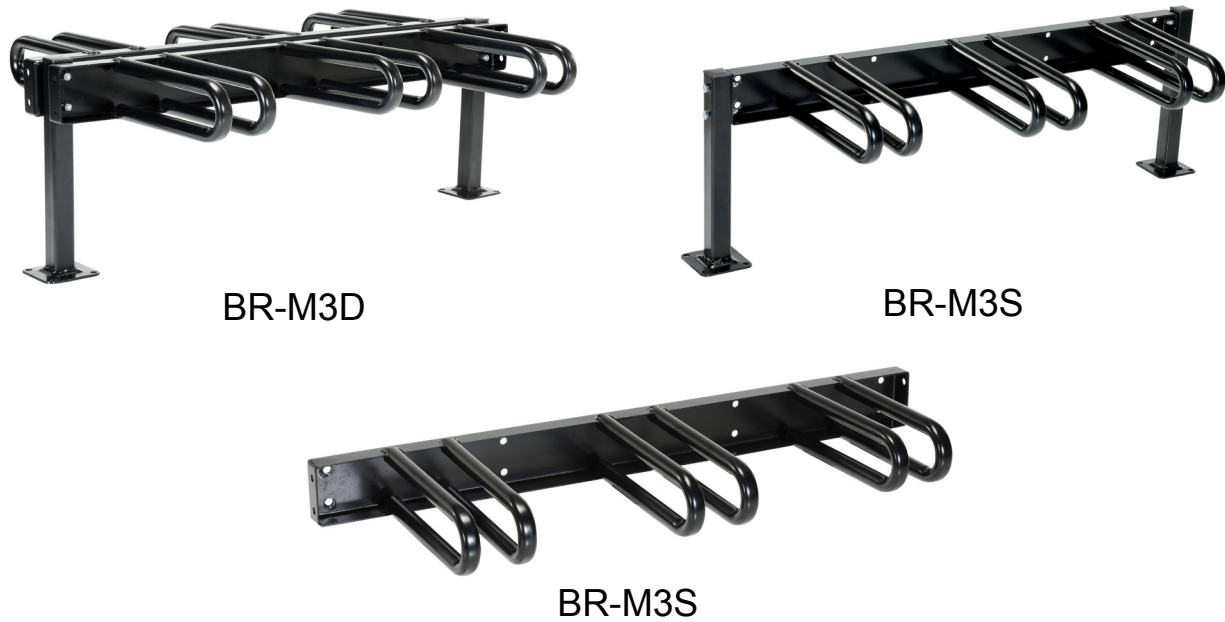

Receiving instructions

After delivery, remove the packaging from the product. Inspect the product closely to determine whether it sustained damage during transport. If damage is discovered, record a complete description of it on the bill of lading. If the product is undamaged, discard the packaging.

Replacement Parts and Technical Service

For answers to questions not addressed in these instructions and to order replacement parts, labels, and accessories, call our Technical Service and Parts Department at (260) 665-7586. The department can also be contacted online at http://www.vestilmfg.com/parts_info.htm.

NOTE: The end-user is solely responsible for confirming that product design, use, and maintenance comply with laws, regulations, codes, and mandatory standards applied where the product is used.

Table of Contents	
Signal Words.....	2
Hazards.....	2
Specifications.....	2
Exploded View, Bill of Materials, and Dimensions: BR-M3S.....	3
Exploded View, Bill of Materials, and Dimensions: BR-M3D.....	4
Installation Diagram and Dimensions: BR-M3S-W.....	5
Record of Satisfactory Condition.....	6
Inspections and Maintenance.....	6
Labeling Diagram.....	6
Limited Warranty.....	7

SIGNAL WORDS

This manual classifies personal injury risks and situations that might cause property damage with signal words. Signal words indicate the seriousness of injuries that might result if a particular act does, or does not, occur.



Identifies a hazardous situation which, if not avoided, WILL result in DEATH or SERIOUS INJURY. Use of this signal word is limited to the most extreme situations.



Identifies a hazardous situation which, if not avoided, COULD result in DEATH or SERIOUS INJURY.



Indicates a hazardous situation which, if not avoided, COULD result in MINOR or MODERATE injury.



Identifies practices likely to result in product/property damage, such as operation that might damage the product.

HAZARDS

Vestil strives to identify all foreseeable hazards associated with the use of its products. However, no manual can address every possible risk. The most effective means for avoiding injury are to read all of the instructions before installing the rack and to apply sound judgement whenever using, inspecting, and maintaining it.



If this product is used improperly or carelessly, the operator and/or bystanders might sustain serious personal injuries or even be killed. ALWAYS use the product properly:

- **Read and understand the entire manual before assembling, installing, using or servicing the product.** Read the manual to refresh your understanding of proper use and maintenance procedures whenever necessary.
- DO NOT exceed the capacity.
- Inspect the bicycle rack according to the instructions in [Inspections & Maintenance](#) on p. 6. DO NOT use the product until it is fully restored to satisfactory condition. ONLY use manufacturer-approved replacement parts.
- DO NOT use the rack UNLESS it is securely anchored to the ground (BR-M3S) or wall (BR-M3S-W).
- DO NOT remove or obscure any label. All product labels must be readable and undamaged.
- DO NOT modify the bicycle rack in any way. **Unauthorized modifications automatically void the Limited Warranty (see p. 5) and might make the rack unsafe to use.**

SPECIFICATIONS

Dimensions, net weight, and other specifications are provided in the following table.

Model	Mounting location	Mounting holes	Overall dimensions (L x W x H)	Net Weight
BR-M3S-BK	Ground	2 posts per rack; 4 anchor bolt holes per post	45 ⁷ / ₈ in. x 14 ⁷ / ₁₆ in. x 14 ³ / ₈ in. 114.3cm x 37cm x 38cm	30 lb. 13.6 kg
BR-M3D-BK	Ground	2 posts per rack; 4 anchor bolt holes per post	45 ⁷ / ₈ in. x 25in. x 14 ³ / ₈ in. 102cm x 71cm x 66cm	51 lb. 23.2 kg
BR-M3S-W-BK	Wall	4 anchor bolt holes	40 ³ / ₈ in. x 13 ³ / ₁₆ in. x 4 ¹ / ₂ in. 102cm x 46cm x 25.5cm	22 lb. 10 kg

EXPLODED VIEW AND BILL OF MATERIALS: BR-M3S

3

4

Foot pad

Bicycle divider

Fasten the rack to the ground with 4 anchor bolts. Install bolts through all 4 bolt holes in each foot pad. Use $\frac{3}{8}$ " anchor bolts of appropriate length (determined by your building engineer).


2

5

1


Item	Part no.	Description	Quantity
1	31-516-007	Mounting post weldment:	2
	31-516-013	BR-M3S-BK; or BR-M3S-GAL	2
2	31-514-249	Bicycle rack frame weldment:	1
	31-514-250	BR-M3S-BK; or BR-M3S-GAL	1
3	21-024-016	Cap, square	2
4	11112	$\frac{3}{8}$ in. – 16 x 2 $\frac{1}{4}$ in. HHCS bolt	4
5	37024	$\frac{3}{8}$ in. lock nut	4

DIMENSIONS: BR-M3S

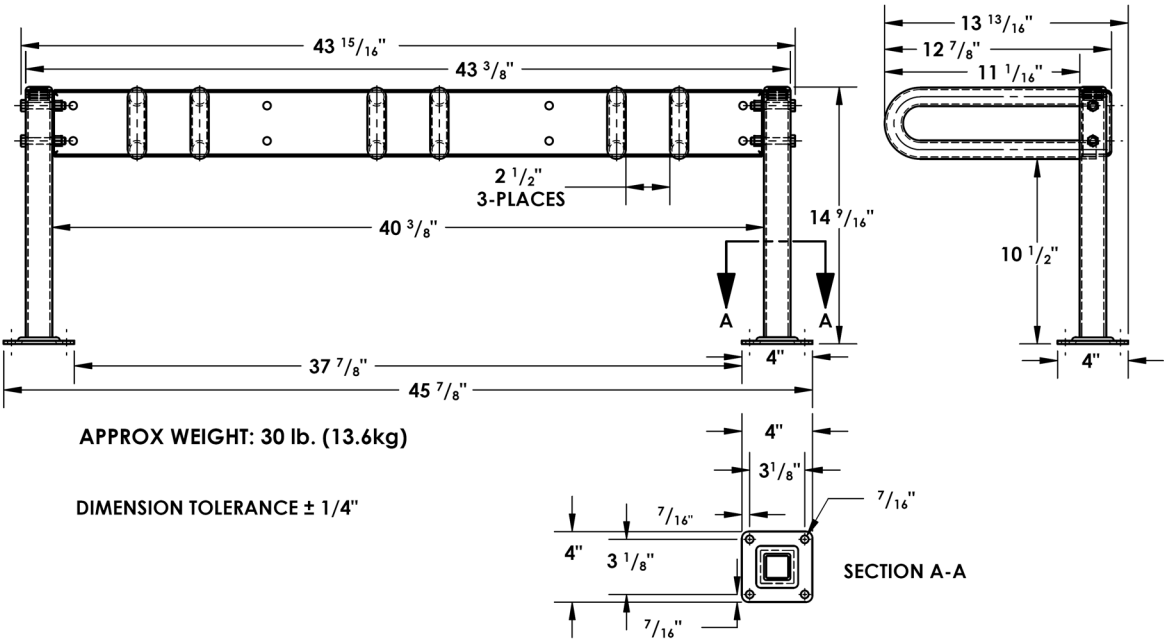


EXPLODED VIEW AND BILL OF MATERIALS: BR-M3D

Fasten the rack to the ground by installing 4 bolts through the bolt holes in each foot pad. Use 3/8 in. anchor bolts of appropriate length (determined by your building engineer).

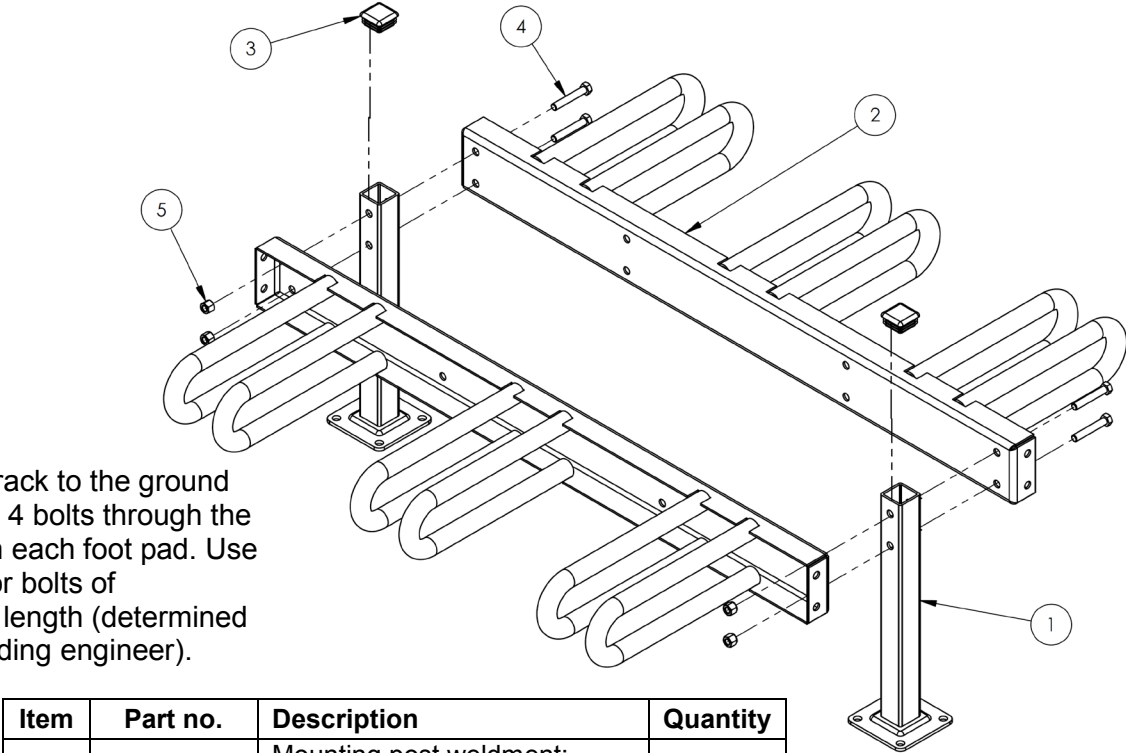


Item	Part no.	Description	Quantity
1	31-516-007	Mounting post weldment:	2
	31-516-013	BR-M3D-BK; or BR-M3D-GAL	2
2	31-514-249	Bicycle rack frame weldment:	2
	31-514-250	BR-M3D-BK; or BR-M3D-GAL	2
3	21-024-016	Cap, square	2
4	11112	3/8in. – 16 x 2 1/4in. HHCS bolt	4
5	37024	3/8in. lock nut	4

DIMENSIONS: BR-M3D

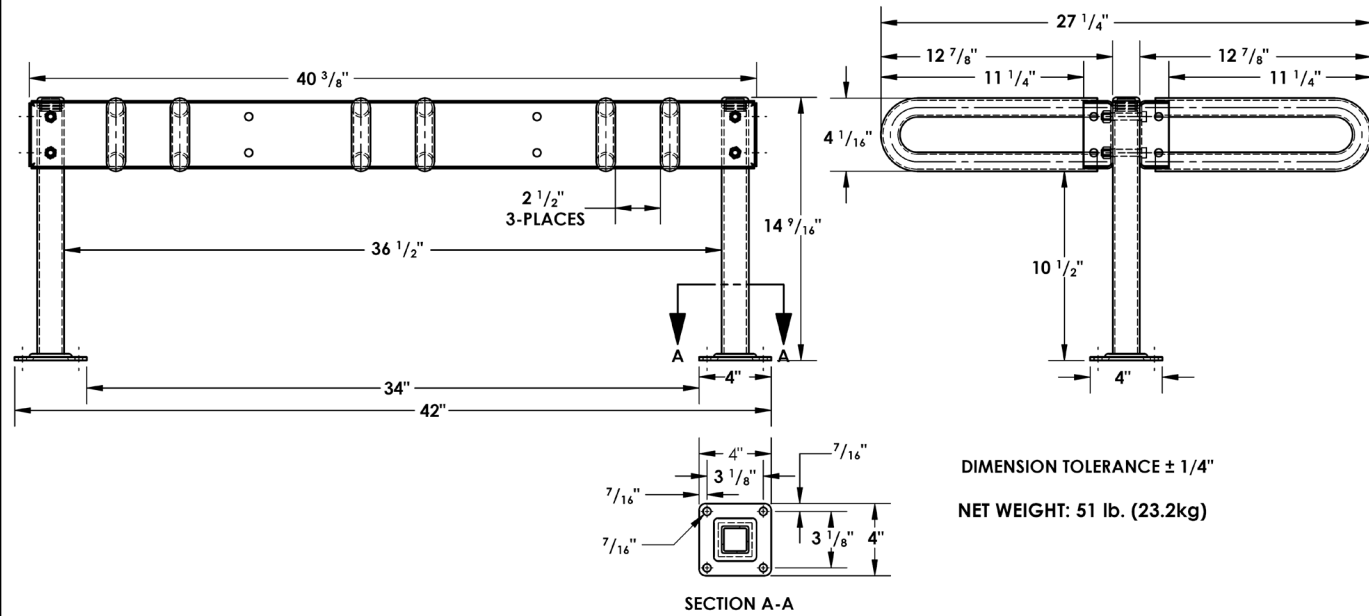

INSTALLATION DIAGRAM: BR-M3S-W


Bolt holes (2) for mounting the rack to a wall (upper bolt hole cannot be seen in this view)

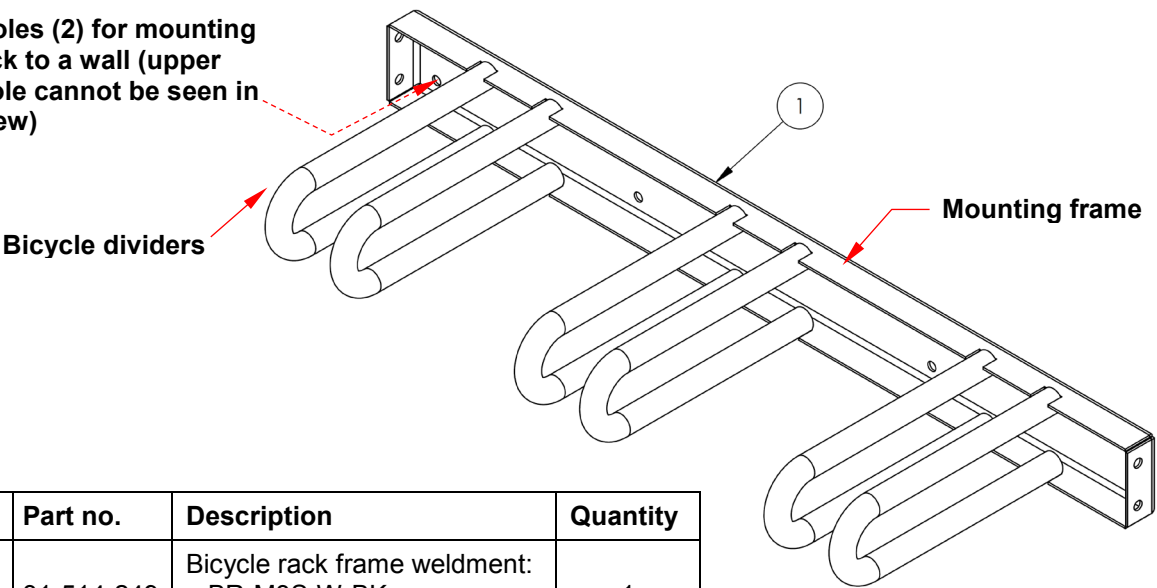

Item	Part no.	Description	Quantity
1	31-514-249	Bicycle rack frame weldment: BR-M3S-W-BK	1
	31-514-250	BR-M3S-W-GAL	1

Pairs of bolt holes in the mounting frame are present in 6 locations. To mount the rack to a wall, install $\frac{3}{8}$ " anchor bolts of proper length (determined by your building engineer) through the bolt holes.

DIMENSIONS

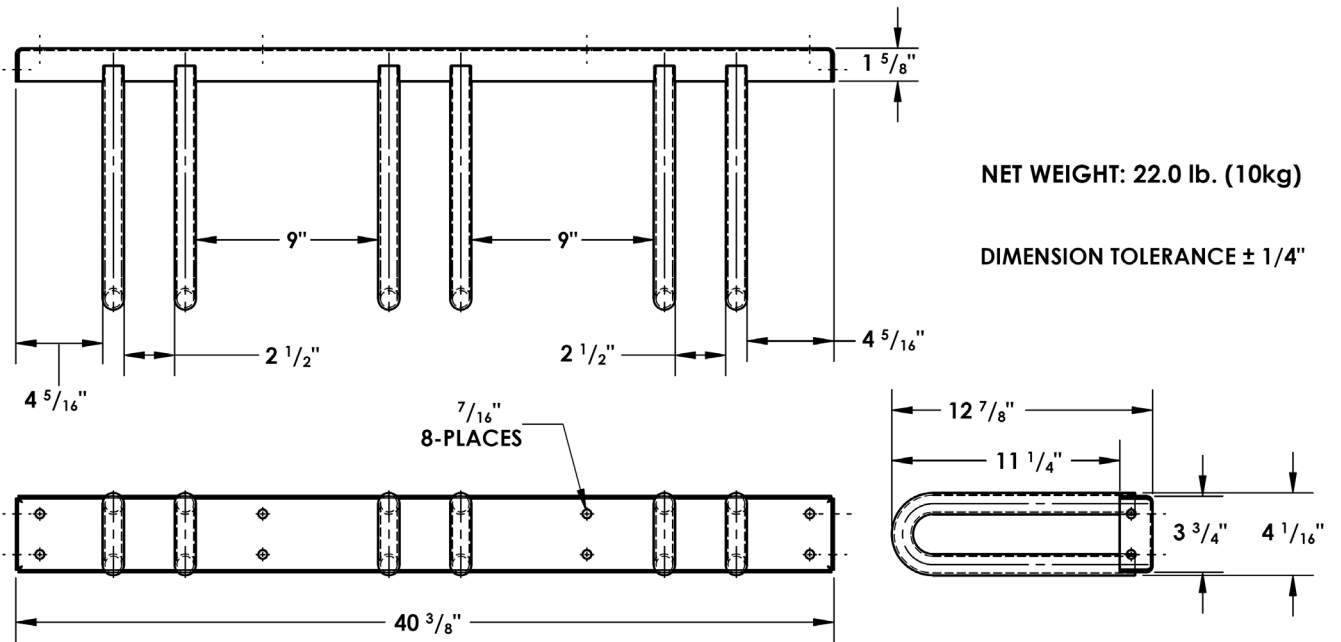

RECORD OF SATISFACTORY CONDITION (THE “RECORD”)

Record the condition of the rack before putting it into service. Thoroughly photograph the unit from multiple angles. Take close range photographs of all labeling, post connections, anchoring points, and hardware. Collate all photographs and writings into a file. Mark the file appropriately to identify it. This file is a record of the rack in satisfactory condition. Compare the results of each *inspection* to this record to determine whether the rack is in satisfactory condition. Purely cosmetic changes, like damaged surface finish (paint or powdercoat), are not changes from satisfactory condition. However, touchup paint should be applied to all affected areas as soon as damage occurs.

INSPECTIONS AND MAINTENANCE

At least once per month, thoroughly inspect the rack. Compare its condition to the *RECORD*. Replace all components that are not in satisfactory condition:

- Examine the rack for cracked welds and severe rust and corrosion.
- Closely inspect the anchor bolts and the ground or wall around the anchor bolts. The rack should be firmly anchored to the ground/wall. If the rack wobbles, tighten the anchor bolts. If the bolts cannot be tightened, install the rack in another location.
- Tighten loose fasteners
- Apply touchup paint to all areas where the finish is damaged. Before applying paint, remove rust with steel wool and clean the area.

LABELING DIAGRAM

The unit should be labeled as shown in the diagram. However, label content and location are subject to change so your product might not be labeled exactly as shown. Thoroughly photograph the unit when you first receive it as discussed in the [Record of Satisfactory Condition](#) section of this manual. Make sure that your Record includes a photograph of each label. Modify this diagram, if necessary, to indicate labeling actually applied. Replace all labels that are, damaged, missing, or not easily readable (e.g. faded). Contact the [Parts Department](#) online at http://www.vestilmfg.com/parts_info.htm to order replacement labels. You may also call (260) 665-7586 and ask the operator to connect you to the [Parts Department](#).



A: Label 287

MODEL/MODÉLO/MODÈLE _____	
STATIC CAPACITY (evenly distributed) _____	lbs.
LA CAPACIDAD CONSTANTE (distribuida uniformemente) _____	kgs.
CAPACITÉ STATIQUE (distribuée régulièrement) _____	kgs.
SERIAL/SERIE/SÉRIE _____	
287 REV 0812	

B: Label 204 (not applied to BR-M3S-W)

▲ WARNING	▲ ADVERTENCIA	▲ AVERTISSEMENT
SECURE FRAME TO FLOOR	ASEGURE EL BASTIDOR AL PISO	FIXER SOLIDEMENT LE CADRE AU PLANCHER
		204 Rev 11/10

LIMITED WARRANTY

Vestil Manufacturing Corporation ("Vestil") warrants this product to be free of defects in material and workmanship during the warranty period. Our warranty obligation is to provide a replacement for a defective, original part covered by the warranty after we receive a proper request from the Warrantee (you) for warranty service.

Who may request service?

Only a warrantee may request service. You are a warrantee if you purchased the product from Vestil or from an authorized distributor AND Vestil has been fully paid.

Definition of "original part"?

An original part is a part used to make the product received by the Warrantee.

What is a "proper request"?

A request for warranty service is proper if Vestil receives: 1) a photocopy of the Customer Invoice that displays the shipping date; AND 2) a written request for warranty service including your name and phone number. Send requests by one of the following methods:

US Mail

Vestil Manufacturing Corporation
2999 North Wayne Street, PO Box 507
Angola, IN 46703

Fax

(260) 665-1339
Phone
(260) 665-7586

Email

info@vestil.com
Write "Warranty service request"
in subject field.

In the written request, list the parts believed to be defective and include the address where replacements should be delivered. After Vestil receives your request for warranty service, an authorized representative will contact you to determine whether your claim is covered by the warranty. Before providing warranty service, Vestil will require you to send the entire product, or just the defective part (or parts), to its facility in Angola, IN.

What is covered under the warranty?

The warranty covers defects in the following original, dynamic parts: motors, hydraulic pumps, motor controllers, and cylinders. It also covers defects in original parts that wear under normal usage conditions ("wearing parts"), such as bearings, hoses, wheels, seals, brushes, and batteries.

How long is the warranty period?

The warranty period for original dynamic components is 90 days. For wearing parts, the warranty period is 90 days. Both warranty periods begin on the date Vestil ships the product to the Warrantee. If the product was purchased from an authorized distributor, the periods begin when the distributor ships the product. Vestil may, at its sole discretion, extend a warranty period for products shipped from authorized distributors by up to 30 days to account for shipping time.

If a defective part is covered by the warranty, what will Vestil do to correct the problem?

Vestil will provide an appropriate replacement for any *covered* part. An authorized representative of Vestil will contact you to discuss your claim.

What is not covered by the warranty?

The Warrantee (you) is responsible for paying labor costs and freight costs to return the product to Vestil for warranty service.

Events that automatically void this Limited Warranty.

- Misuse;
- Negligent assembly, installation, operation or repair;
- Installation/use in corrosive environments;
- Inadequate or improper maintenance;
- Damage sustained during shipping;
- Collisions or other accidents that damage the product;
- Unauthorized modifications: Do not modify the product IN ANY WAY without first receiving written authorization from Vestil.

Do any other warranties apply to the product?

Vestil Manufacturing Corp. makes no other express warranties. All implied warranties are disclaimed to the extent allowed by law. Any implied warranty not disclaimed is limited in scope to the terms of this Limited Warranty. Vestil makes no warranty or representation that this product complies with any state or local design, performance, or safety code or standard. Noncompliance with any such code or standard is not a defect in material or workmanship.

