



# Forklift Tie-Down Clamps

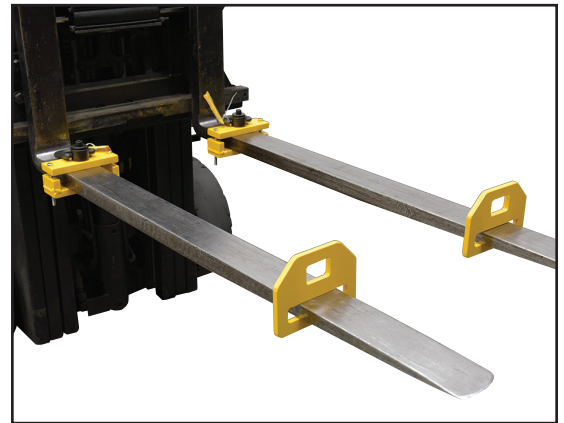

## Standard Features:

- Sold in pairs.
- Comprised of four pieces. (2 brackets and 2 clamps)
- A screw clamp is placed closest to the forklift driver while the eye bracket is positioned in front of the load.
- Simply use the preferred type of tie down such as a nylon strap or chain to secure the load. (strap and chain not included)
- Uniform capacity: 4,400lbs. (2,200lbs, per clamp/bracket)
- Clamps to fit forks: 6"W x 2-3/4"H.
- Tough baked-in powder coated yellow finish.
- Durable steel construction.
- Made in the U.S.A.

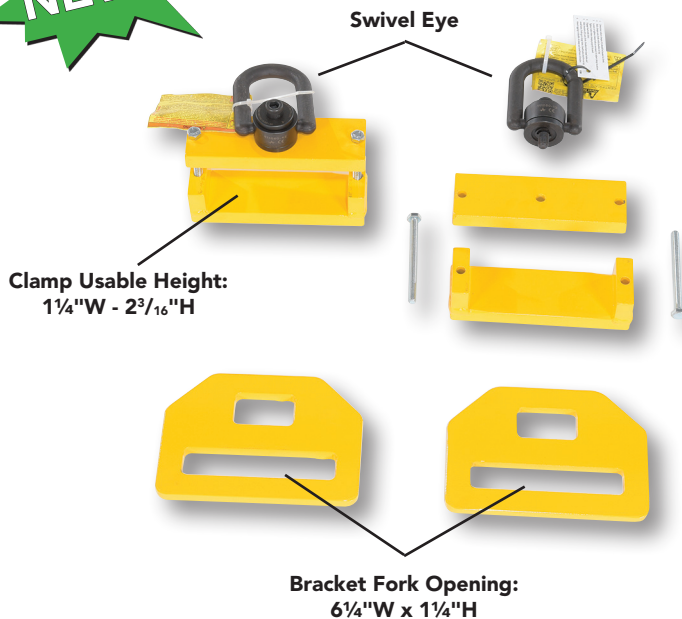

MODEL NUMBER	ACCOMMODATES FORKS (W x H)	OVERALL SCREW CLAMP (W x D)	CLAMP USABLE HEIGHT RANGE	UNIFORM CAPACITY	WEIGHT (POUND)
FTDC-6-4400	6" x 2 3/4"	7 3/4" x 2 1/2"	1 1/4" - 2 13/16"	4,400 lbs	36

**A great asset when securing loads for transport!**



**Vestil Manufacturing Corporation**  
**Larissa Flora - Sales Representative**

2999 North Wayne Street, P.O. Box 570  
 Angola, Indiana 46703, USA  
 Phone: (260) 624-4332 Fax: (260) 665-1339  
 E-Mail: [larissa@vestil.com](mailto:larissa@vestil.com) Web: [www.vestil.com](http://www.vestil.com)