



# **HOOK BASE with RUBBER PUSH BUMPER**

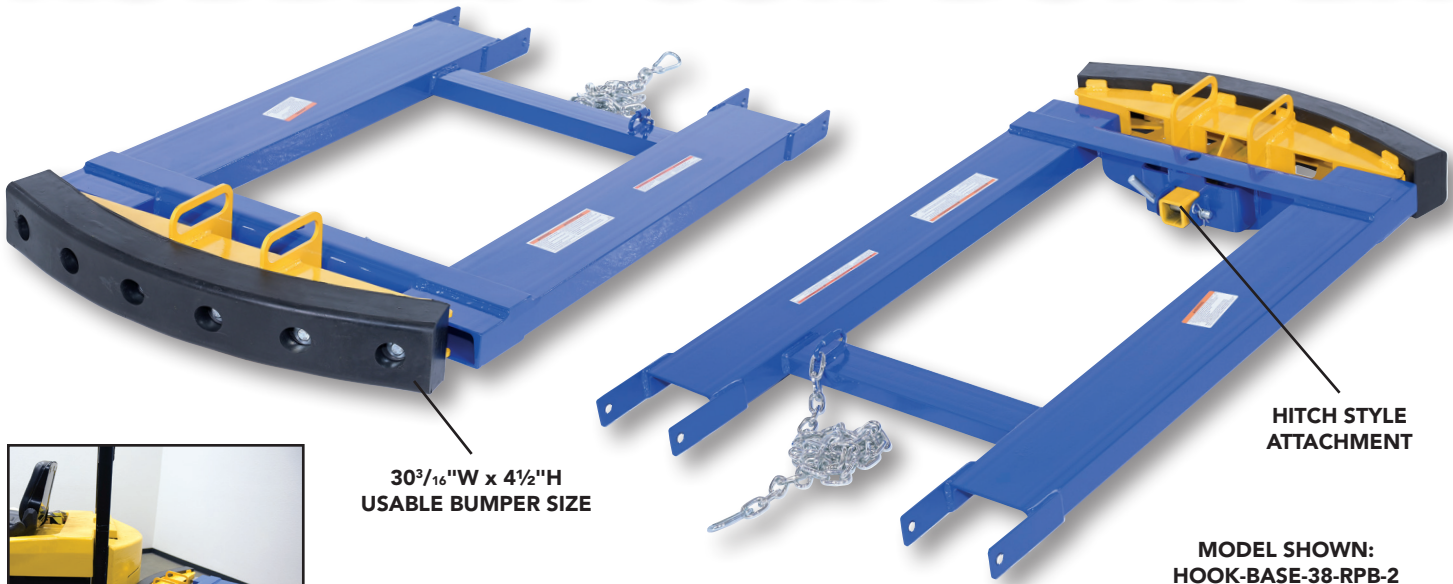

BUMPER HAS A 95% IMPACT RECOVERY

## **Standard Features:**

- Bumper tensile strength of 950 to 1050 PSI.
- 5"W x 2"H usable fork pockets.
- Rubber bumper has a 95% impact recovery.
- Secures to fork truck with safety restraint chain.
- Units are to be used for **PUSHING** only, not towing.
- Steel construction with a powder coat finish.

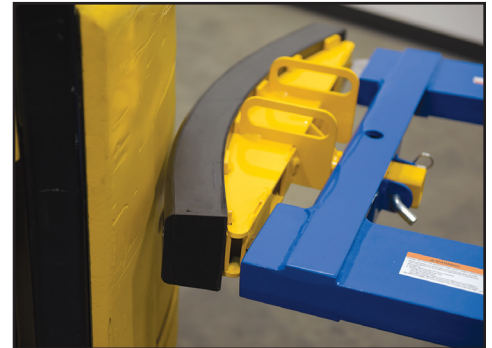

MODEL NUMBER	OVERALL SIZE (W x L x H)	USABLE BUMPER SIZE	MINIMUM FORK LENGTH	WEIGHT (LB)
HOOK-BASE-32-RPB-2	30 <sup>1</sup> / <sub>2</sub> " x 47 <sup>3</sup> / <sub>16</sub> " x 8 <sup>1</sup> / <sub>2</sub> "	30 <sup>3</sup> / <sub>16</sub> "W x 4 <sup>1</sup> / <sub>2</sub> "H	36"	165
HOOK-BASE-38-RPB-2	30 <sup>1</sup> / <sub>2</sub> " x 53 <sup>3</sup> / <sub>16</sub> " x 8 <sup>1</sup> / <sub>2</sub> "	30 <sup>3</sup> / <sub>16</sub> "W x 4 <sup>1</sup> / <sub>2</sub> "H	42"	173
HOOK-BASE-44-RPB-2	30 <sup>1</sup> / <sub>2</sub> " x 59 <sup>3</sup> / <sub>16</sub> " x 8 <sup>1</sup> / <sub>2</sub> "	30 <sup>3</sup> / <sub>16</sub> "W x 4 <sup>1</sup> / <sub>2</sub> "H	48"	182

**The front rubber push bumper helps to minimize any damage and abrasion that may occur from pushing!**



**Vestil Manufacturing Corporation**  
**Larissa Flora - Sales Representative**

2999 North Wayne Street, P.O. Box 570  
Angola, Indiana 46703, USA

Phone: (260) 624-4341 Fax: (260) 665-1339  
E-Mail: [larissa@vestil.com](mailto:larissa@vestil.com) Web: [www.vestil.com](http://www.vestil.com)