


# HYDRAULIC SKID STEER BOOM



## Standard Features:

- Hydraulic powered telescoping boom.
- Double acting hydraulic cylinder for accurate load control.
- Designed for rapid attachment and removal.
- Universal mounting plate is on a 32" center.
- Uniform Capacity:
  - 2,500 lb. - Retracted
  - 1,300 lb. - Mid-Extension
  - 600 lb. - Max-Extension
- Auxiliary connections are required for use.
- Durable liquid paint black finish.
- Rugged steel construction for increased lifting strength.

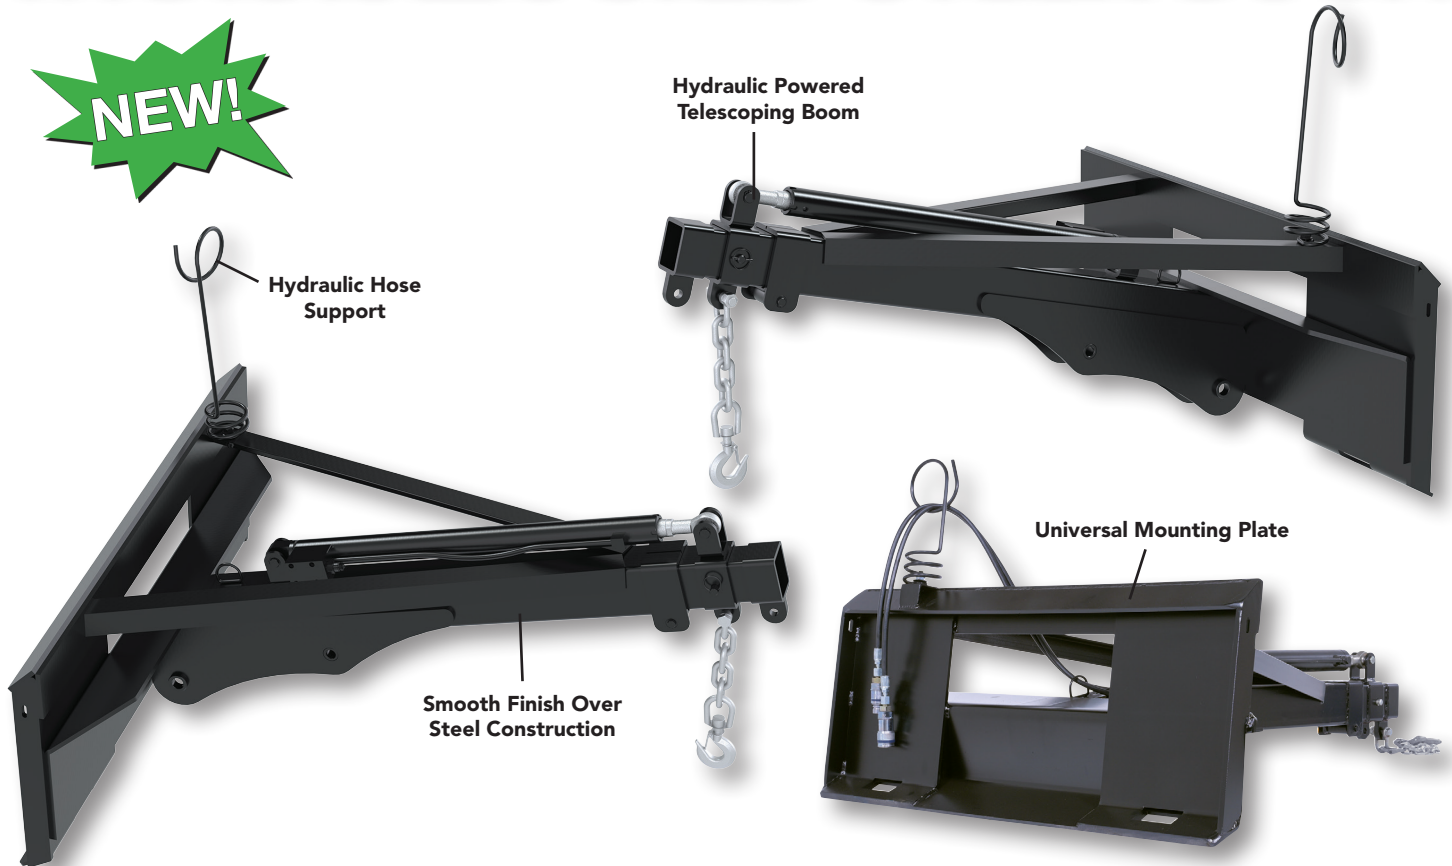

MODEL NUMBER	OVERALL SIZE (W x L x H)	CAPACITY (RETRACTED)	CAPACITY (MID-EXT.)	CAPACITY (MAX-EXT.)	USABLE LENGTH (RETRACTED, MID, MAX)	WEIGHT (LB)
MPLA-HYD-50-2500	46" x 95 <sup>9</sup> / <sub>16</sub> " x 37 <sup>3</sup> / <sub>8</sub> "	2,500 lb.	1,300 lb.	600 lb.	45 <sup>13</sup> / <sub>16</sub> ", 68 <sup>7</sup> / <sub>8</sub> ", 95 <sup>9</sup> / <sub>16</sub> "	352

**A hydraulic skid steer boom attachment transforms your skid steer into a fast acting workhorse!**



## Vestil Manufacturing Corporation

2999 North Wayne Street, P.O. Box 507  
Angola, Indiana 46703, USA

Phone: (260) 665-7586 Fax: (260) 665-1339  
E-Mail: [info@vestil.com](mailto:info@vestil.com) Web: [www.vestil.com](http://www.vestil.com)