


# HYDRAULIC TELESCOPING BOOM- LM-1T-8-24-HBE-TP

APPROX WEIGHT: 714.78 lbs.  
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

\*\*\* ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE \*\*\*

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

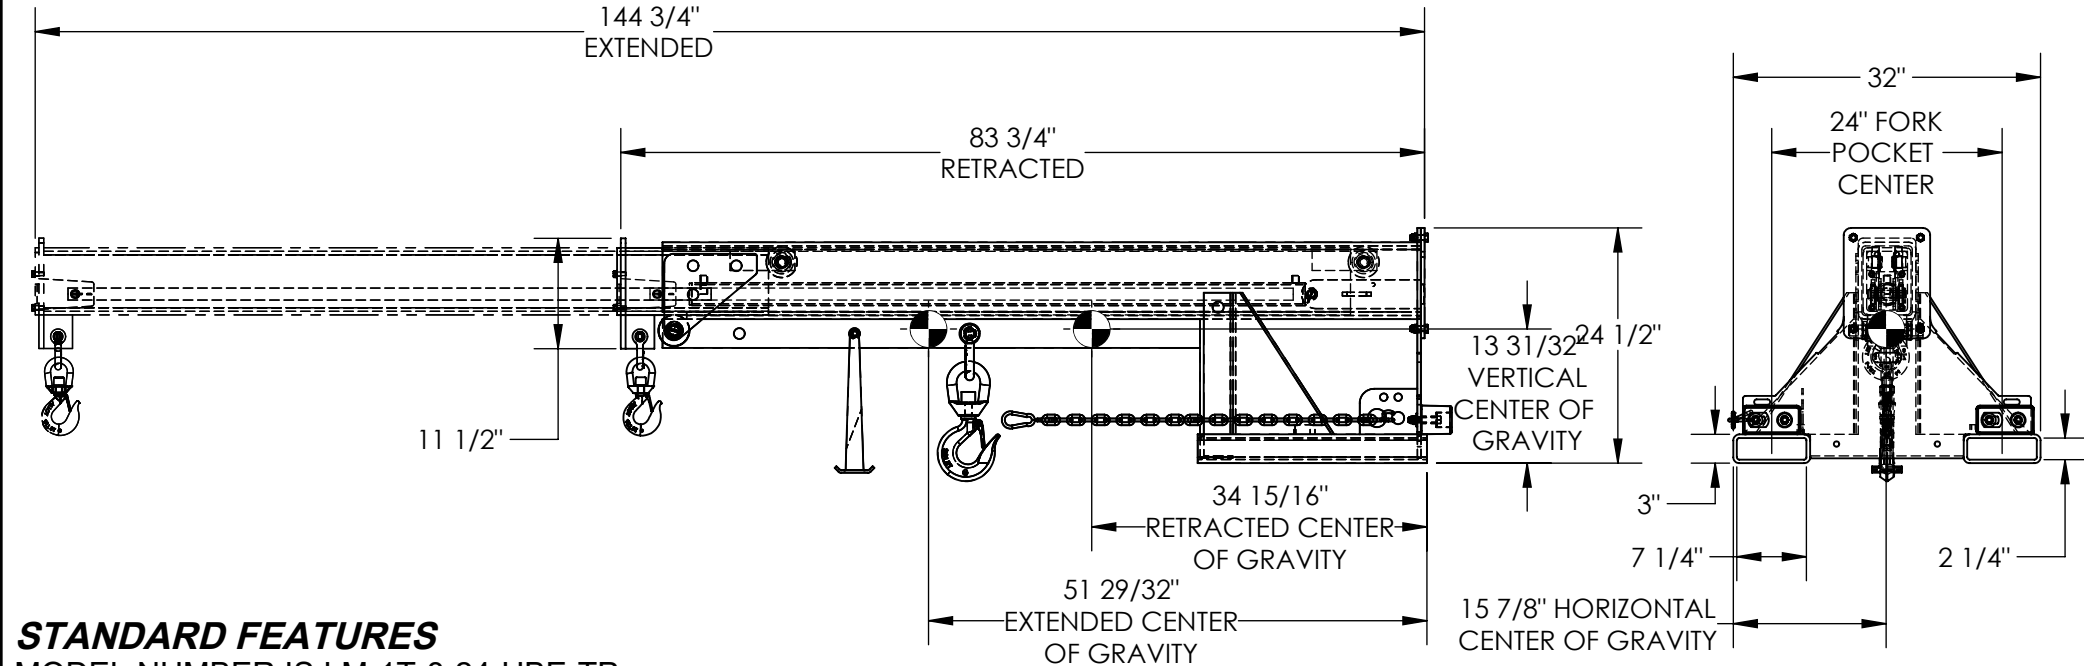

## STANDARD FEATURES

- MODEL NUMBER IS LM-1T-8-24-HBE-TP
- MAXIMUM MOVABLE LOAD IS 2,000 LBS
- LOST LOAD - 715 LBS.
- OVERALL HEIGHT - 24 1/2"
- LENGTH RETRACTED - 83 3/4"
- LENGTH EXTENDED - 144 3/4"
- OVERALL WIDTH - 32"
- 36" MINIMUM HOOK POINT
- 142" MAXIMUM HOOK POINT
- USES FORK TRUCK HYDRAULICS TO EXTEND/RETRACT BOOM
- BOOM CAN BE EXTENDED/RETRACTED WHILE LOADED
- USABLE FORK POCKET - 7 1/4" X 2 1/4"
- 24" FORK POCKET CENTERS
- EFFECTIVE THICKNESS: LESS THAN 1"
- REQUIRES 8,000 LB RATED FORK TRUCK
- FRAME IS DURABLE LIQUID PAINT BLUE FINISH
- BOOM IS DURABLE LIQUID PAINT YELLOW FINISH

## \*--MAXIMUM SINGLE HOOK CAPACITIES

DISTANCE	36"	48"	60"	72"	84"	96"	108"	120"	132"	142"
CAPACITY	8000	6650	6000	5300	4650	4000	3500	3000	2600	2200

DIMENSION TOLERANCE ± 1/4"

## SPECIAL FEATURES

NONE

**A P P R O V A L**

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

**UNITS REQUIRING APPROVAL DRAWINGS OR MODIFIED ARE NON-RETURNABLE**

As drawn       As marked

Signed: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name: \_\_\_\_\_

*LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING*

NEVER EXCEED LOAD CENTER RATING PER FORK TRUCK MANUFACTURER'S GUIDELINES.  
DO NOT USE THIS FORK TRUCK ATTACHMENT IF LOAD WILL EXCEED FORK TRUCK MANUFACTURER'S LOAD CENTER RATING

DISTRIBUTOR'S NAME: VESTIL MANUFACTURING

P.O.# X

W.O.# X

DRAWN BY: KGH DATE: 2/6/2019 SALES: X

REFERENCE: X SCALE: 1:20 FILE NAME: 08-007-397

QUOTED LEAD TIME: X QUOTE # X